



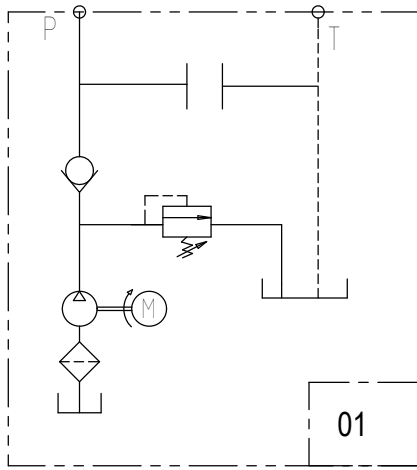

TOLERANCE :mm	
> 0	±0.1
> 6	±0.2
> 30	±0.3
> 120	±1
> 315	±2
> 1000	±5

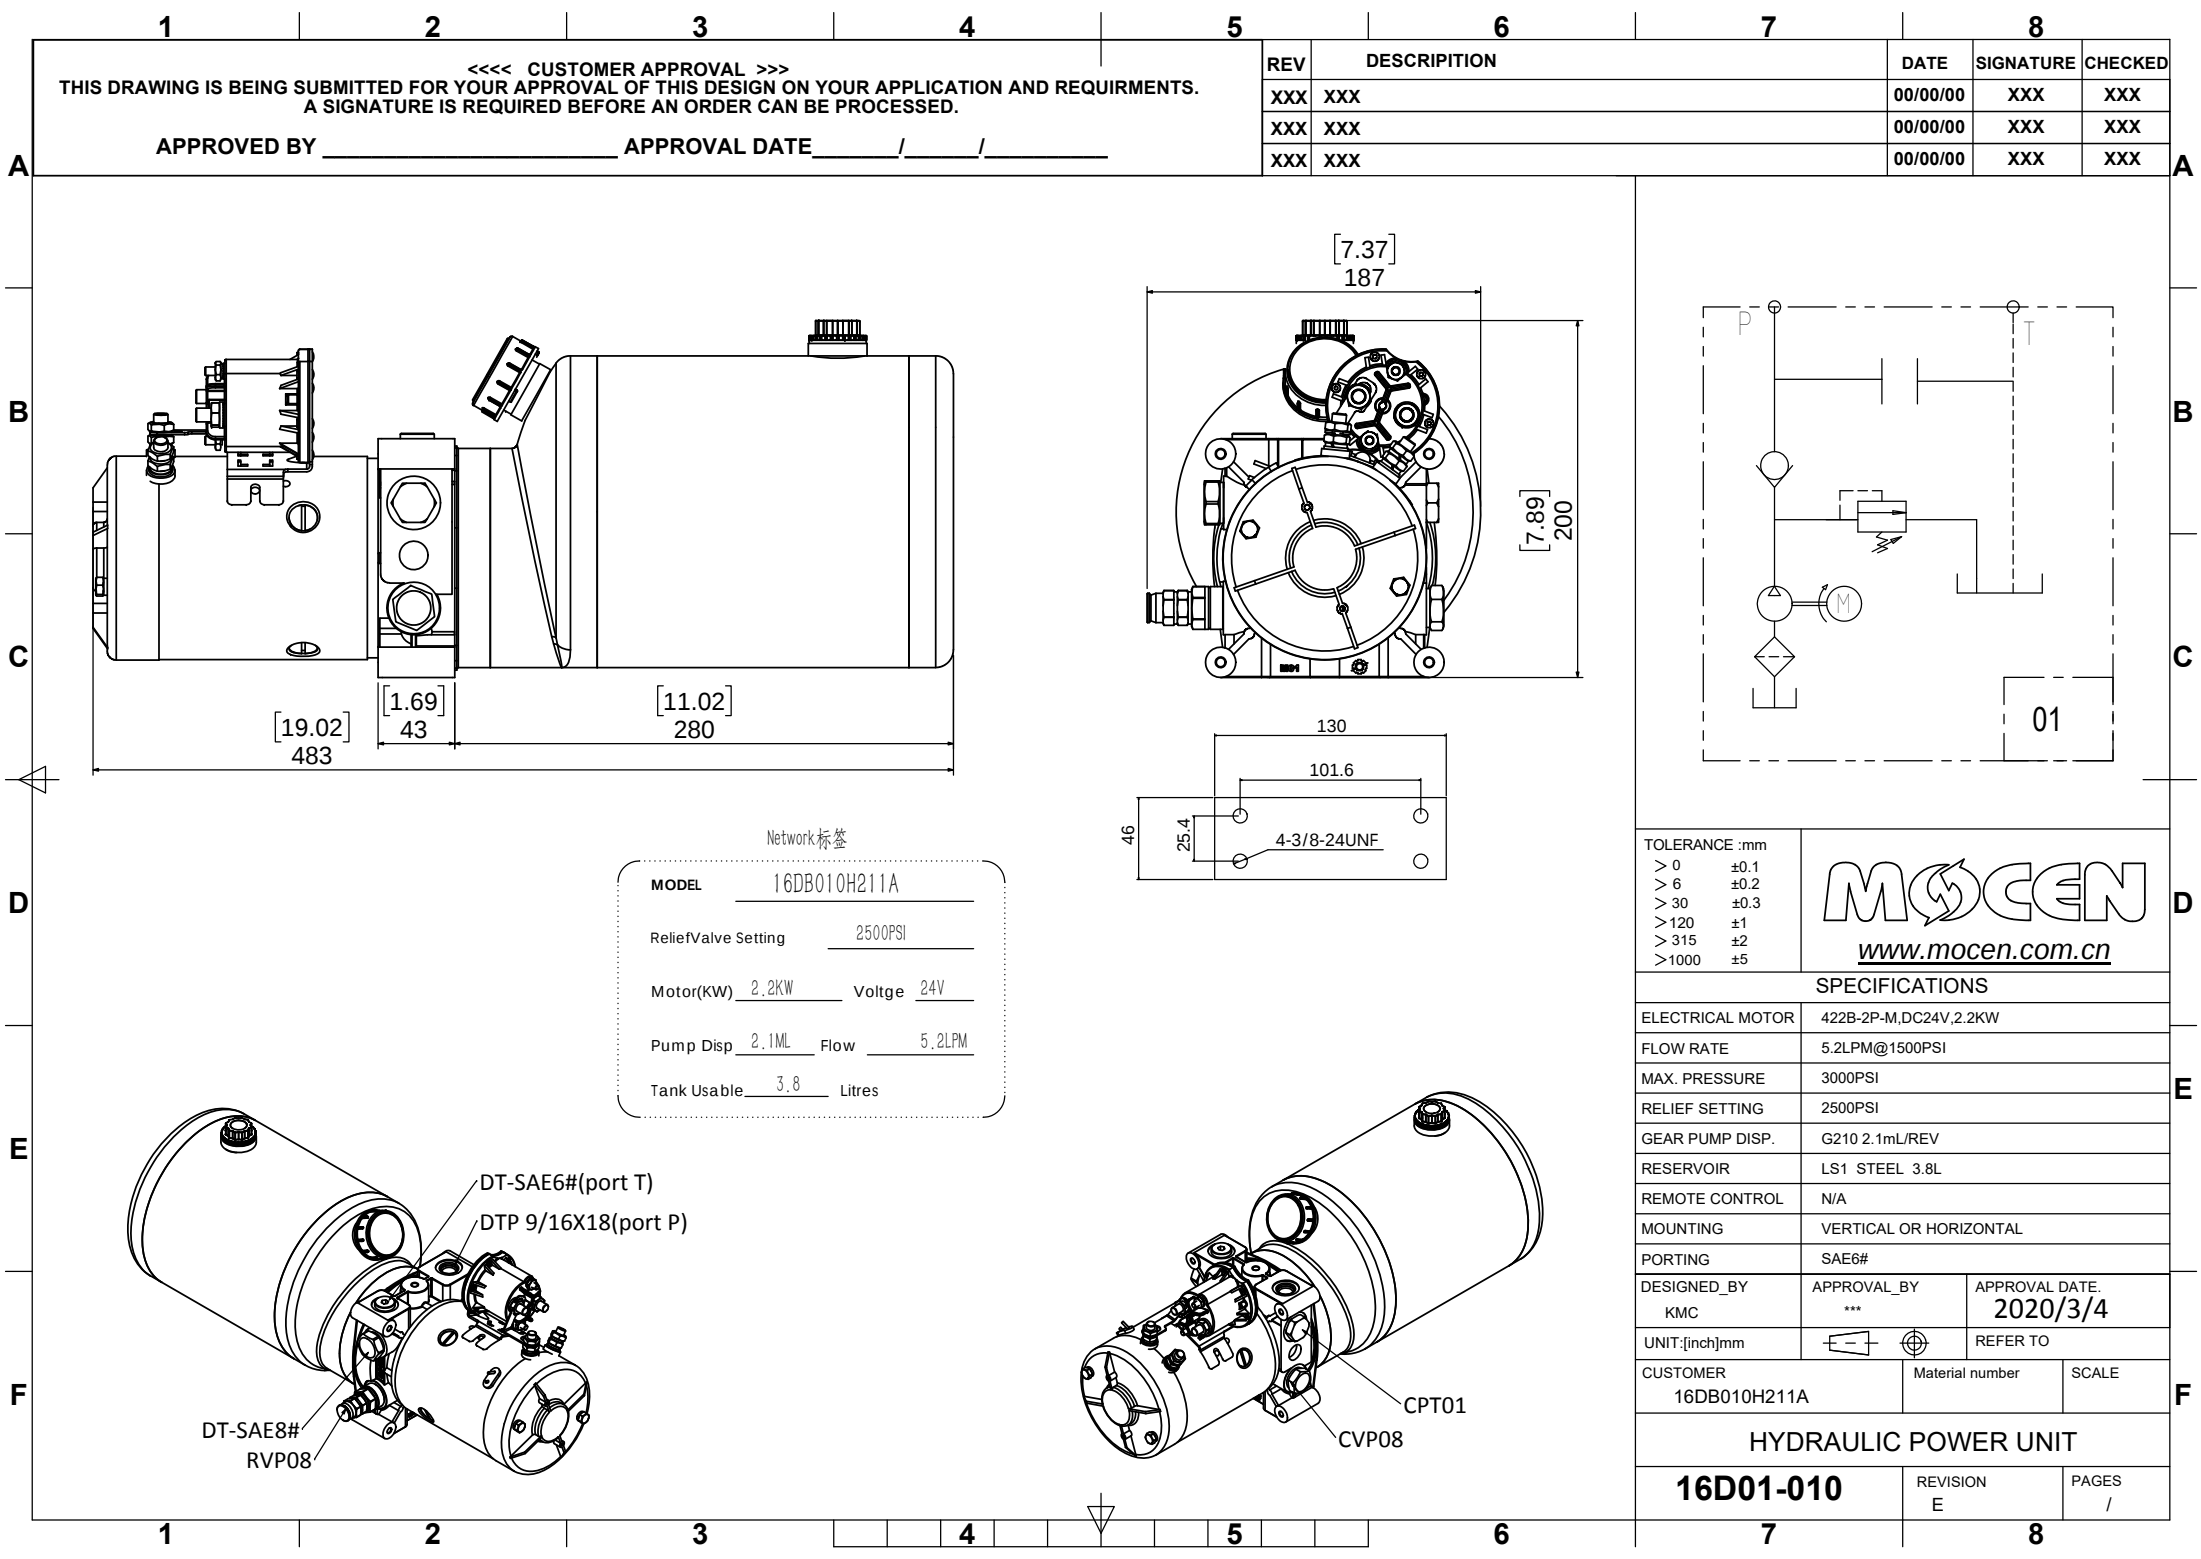

www.mocen.com.cn

SPECIFICATIONS		
ELECTRICAL MOTOR	422B-2P-M,DC24V,2.2KW	
FLOW RATE	5.2LPM@1500PSI	
MAX. PRESSURE	3000PSI	
RELIEF SETTING	2500PSI	
GEAR PUMP DISP.	G210 2.1mL/REV	
RESERVOIR	LS1 STEEL 3.8L	
REMOTE CONTROL	N/A	
MOUNTING	VERTICAL OR HORIZONTAL	
PORTING	SAE#	
DESIGNED_BY	APPROVAL_BY	APPROVAL DATE.
KMC	***	2020/3/4
UNIT:[inch]mm	 	REFER TO
CUSTOMER	Material number	SCALE
16DB010H211A		
HYDRAULIC POWER UNIT		
16D01-010	REVISION	PAGES
	E	/

A B C D E F