



12345

<<<< CUSTOMER APPROVAL >>>>

THIS DRAWING IS BEING SUBMITTED FOR YOUR APPROVAL OF THIS DESIGN ON YOUR APPLICATION AND REQUIRMENTS.
A SIGNATURE IS REQUIRED BEFORE AN ORDER CAN BE PROCESSED.

APPROVED BY _____ APPROVAL DATE ____/____/____

REV	DESCRIPTION	DATE	SIGNATURE	CHECKED
XXX	XXX	00/00/00	XXX	XXX

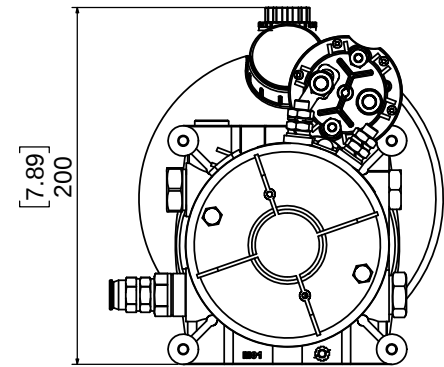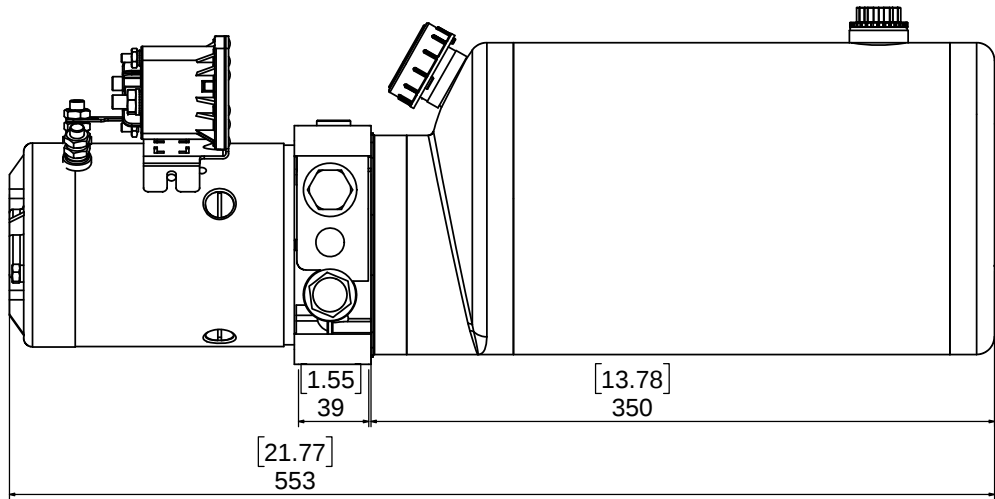

Network 标签

MODEL

16DB010H212A

Relief Valve Setting

2500PSI

Motor(KW)

2.2KW

Voltage

24V

Pump Disp

2.1ML


Flow

5.2LPM

Tank Usable

5.7

Litres



SPECIFICATIONS

ELECTRICAL MOTOR	422B-2P-M,DC24V,2.2KW
FLOW RATE	5.2LPM@1500PSI
MAX. PRESSURE	3000PSI
RELIEF SETTING	2500PSI
GEAR PUMP DISP.	G210 2.1mL/REV
RESERVOIR	LS2A,STEEL, 5.6L
REMOTE CONTROL	N/A
MOUNTING	VERTICAL OR HORIZONTAL
PORTING	SAE6#

MCCEN
FLUID POWER & CONTROLS

DESIGNED BY KMC	CHECKED BY X	APPROVAL DATE 2020/2/12
REFER TO		
CUSTOMER 16DB010H212A	FILE NAME *	SCALE
HYDRAULIC POWER UNIT		
16D01-011		REVISION D SHEET 1:5

