
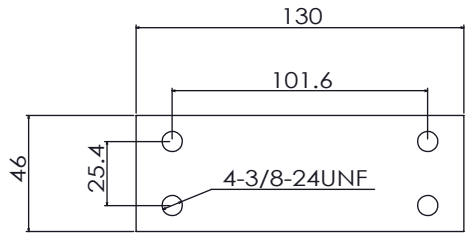
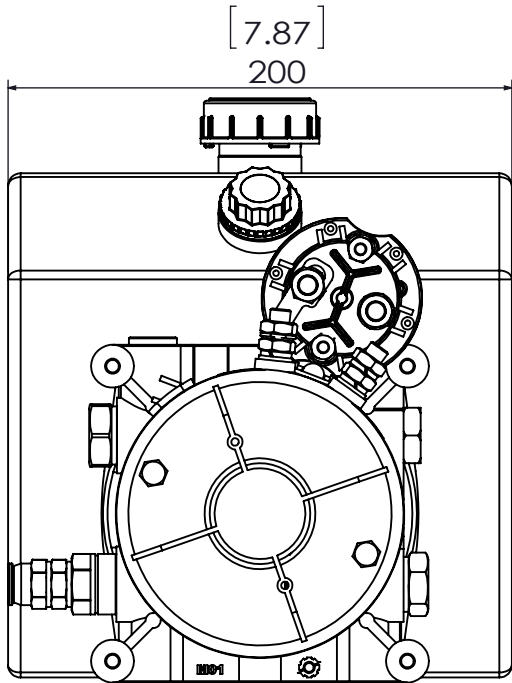


THIS DRAWING IS BEING SUBMITTED FOR YOUR APPROVAL OF THIS DESIGN ON YOUR APPLICATION AND REQUIRMENTS.
A SIGNATURE IS REQUIRED BEFORE AN ORDER CAN BE PROCESSED.




APPROVED BY _____ APPROVAL DATE ____/____/____

REV	DESCRIPTION	DATE	SIGNATURE	CHECKED
XXX	XXX	00/00/00	XXX	XXX
XXX	XXX	00/00/00	XXX	XXX
XXX	XXX	00/00/00	XXX	XXX

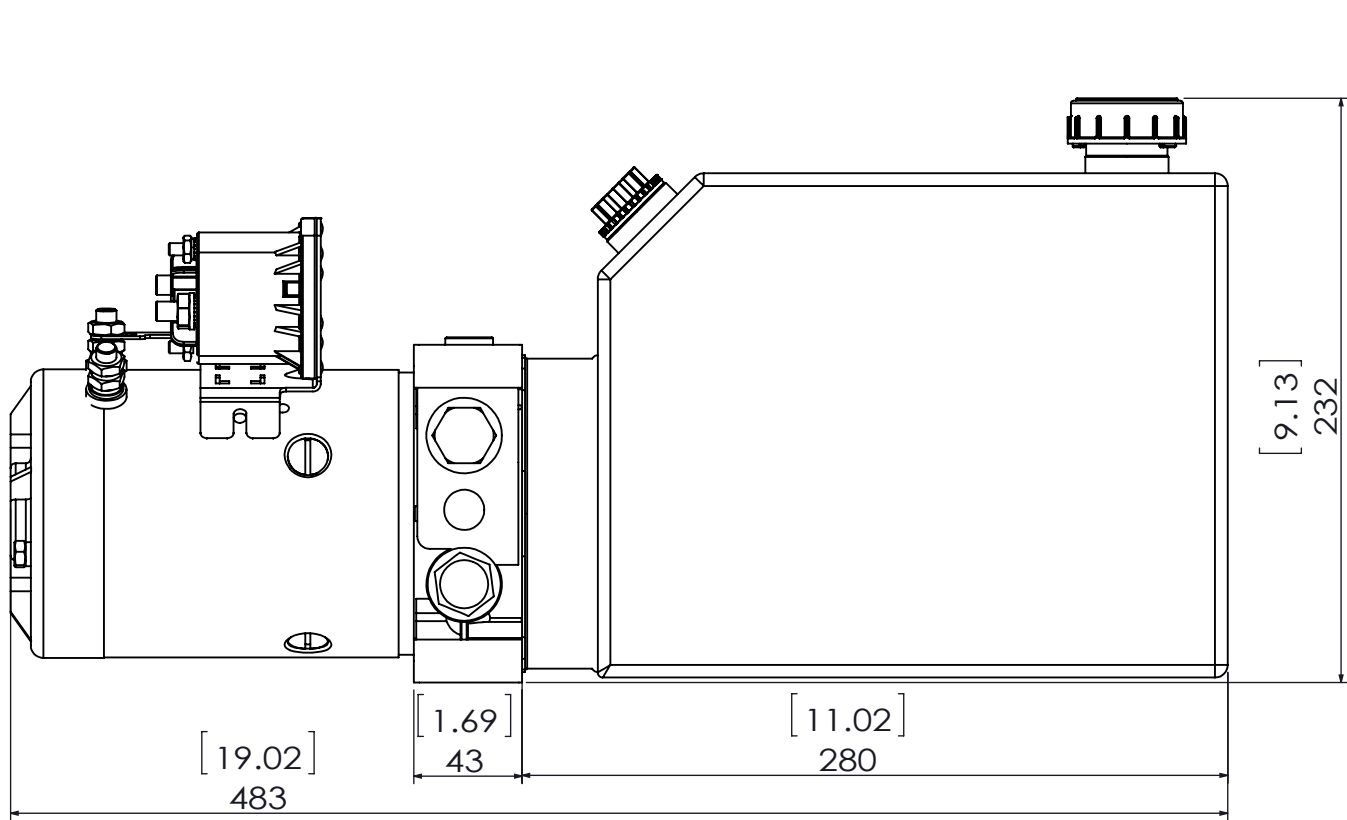

Network 标签

MODEL 16DB010H212B
Relief Valve Setting 2500PSI
Motor(KW) 2.2KW Voltage 24V
Pump Disp 2.1ML Flow 5.2LPM
Tank Usable 7.5 Litres

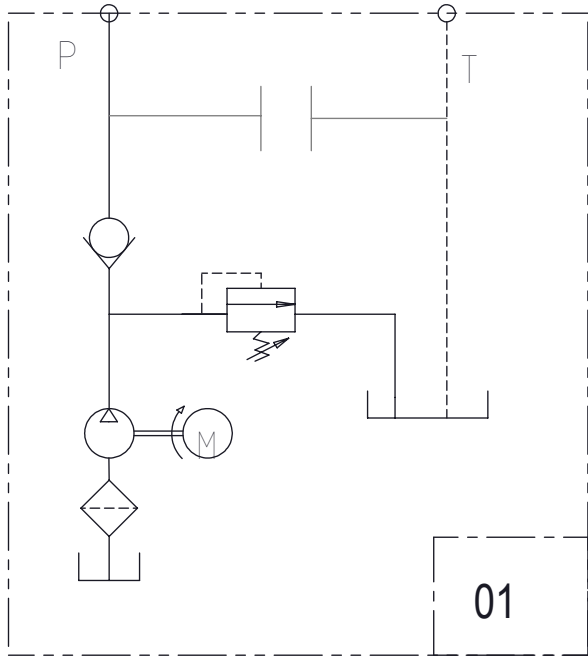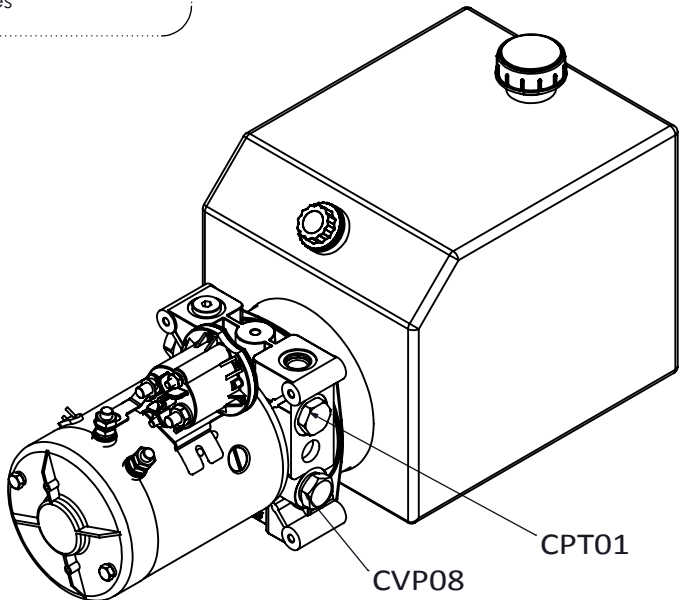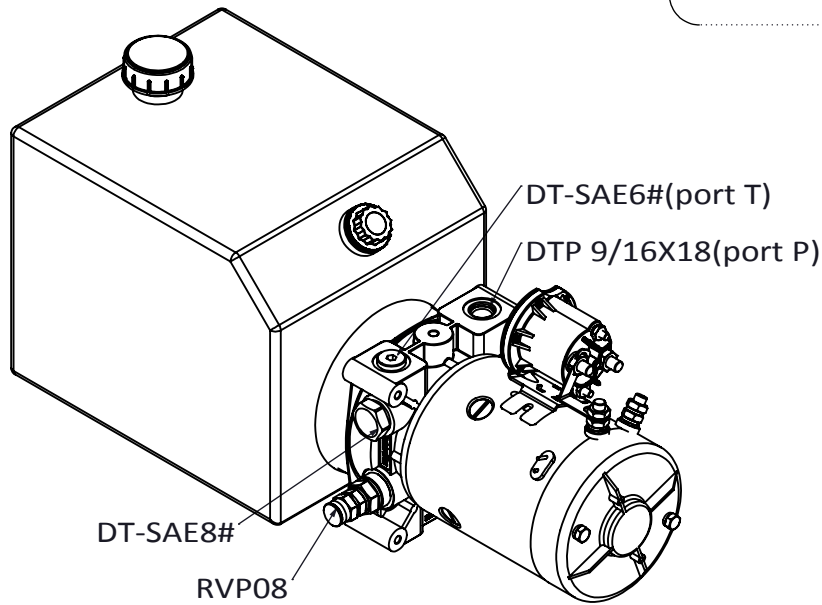

TOLERANCE :mm
> 0 ±0.1
> 6 ±0.2
> 30 ±0.3
> 120 ±1
> 315 ±2
> 1000 ±5



SPECIFICATIONS

ELECTRICAL MOTOR	422B-2P-M,DC24V,2.2KW	
FLOW RATE	5.2LPM@11MPA	
MAX. PRESSURE	3000PSI	
RELIEF SETTING	2500PSI	
GEAR PUMP DISP.	G210 2.1mL/REV	
RESERVOIR	MT2,STEEL,7.5L	
REMOTE CONTROL	N/A	
MOUNTING	VERTICAL OR HORIZONTAL	
PORTING	SAE6#	
DESIGNED_BY KMC	APPROVAL_BY ***	APPROVAL DATE. 2017/02/10
UNIT:[inch]mm	 	REFER TO

CUSTOMER 16DB010H212B	Material number	SCALE
--------------------------	-----------------	-------

HYDRAULIC POWER UNIT

16D01-010B	REVISION C	PAGES /
------------	---------------	------------