


THIS DRAWING IS BEING SUBMITTED FOR YOUR APPROVAL OF THIS DESIGN ON YOUR APPLICATION AND REQUIRMENTS.
A SIGNATURE IS REQUIRED BEFORE AN ORDER CAN BE PROCESSED.

APPROVED BY _____ APPROVAL DATE ____/____/____

REV	DESCRIPTION	DATE	SIGNATURE	CHECKED
XXX	XXX	00/00/00	XXX	XXX
XXX	XXX	00/00/00	XXX	XXX
XXX	XXX	00/00/00	XXX	XXX

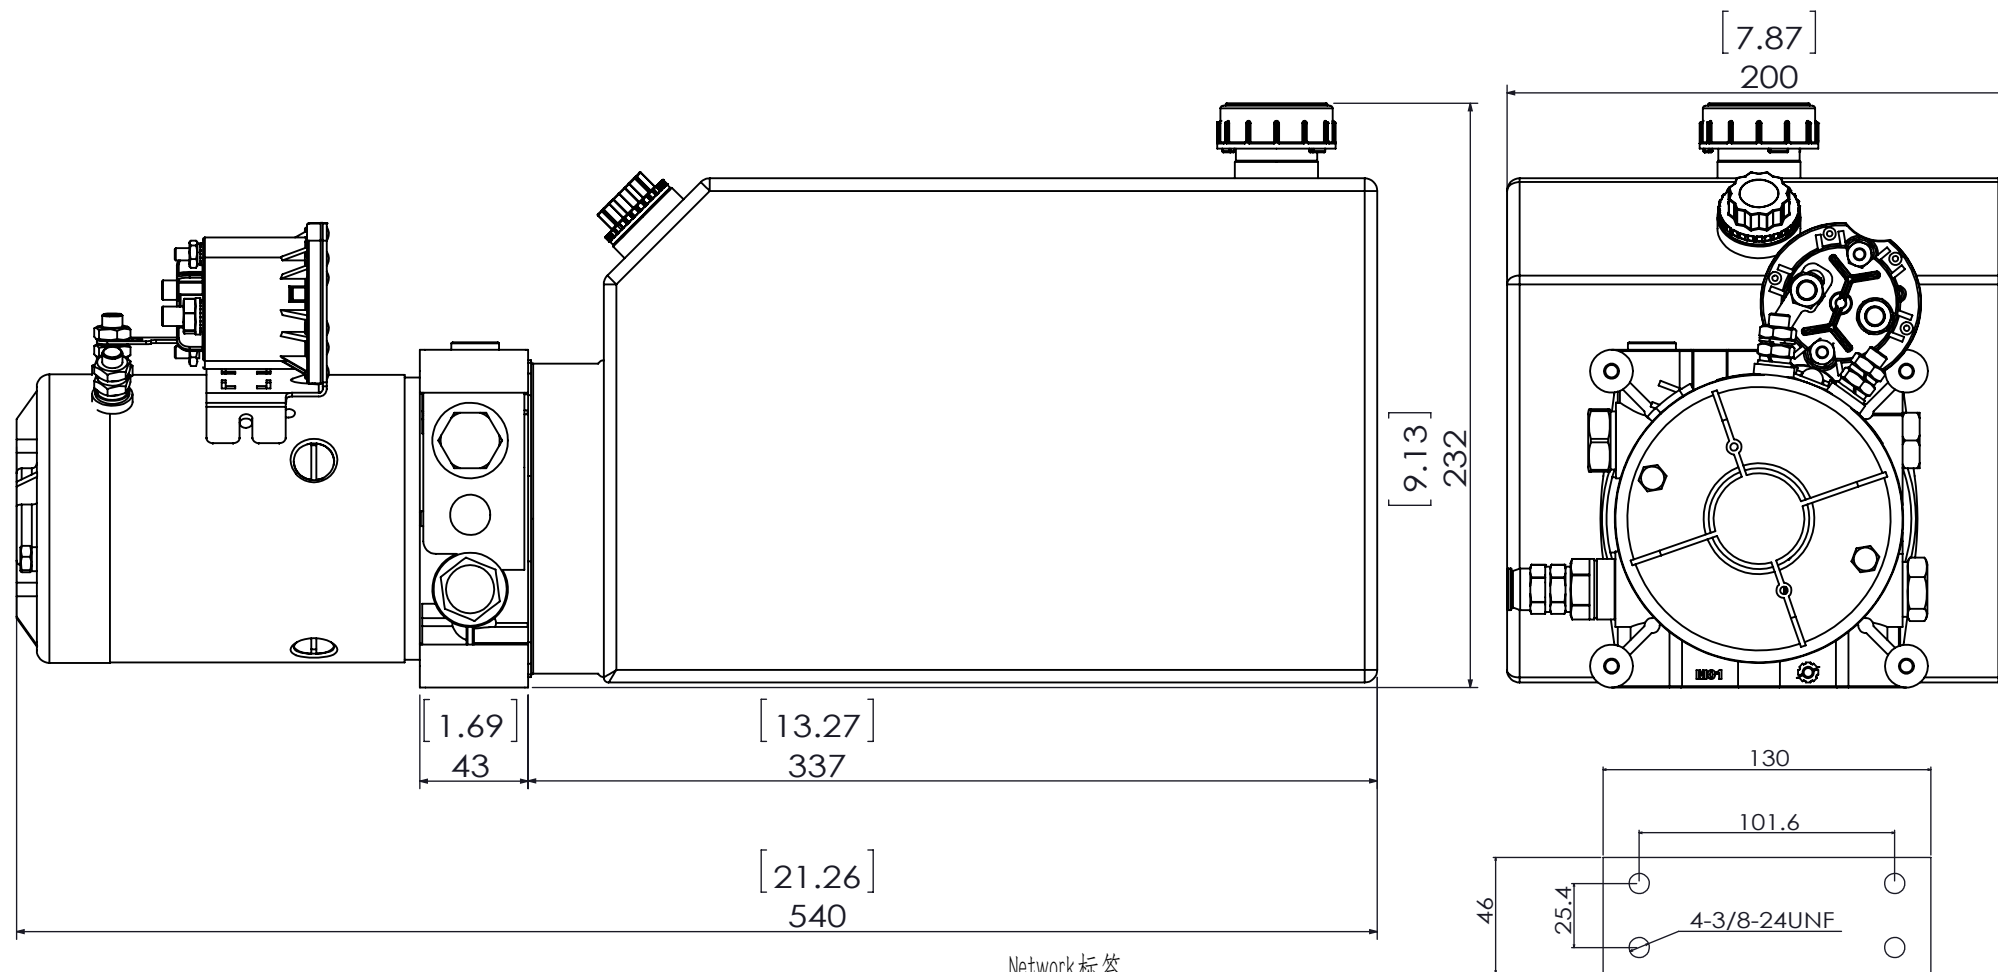

Network标签




MODEL 16DB010H213B

ReliefValve Setting 2500PSI

Motor(KW) 2.2KW Voltage 24V

Pump Disp 2.1ML Flow 5.2LPM

Tank Usable 10 Litres

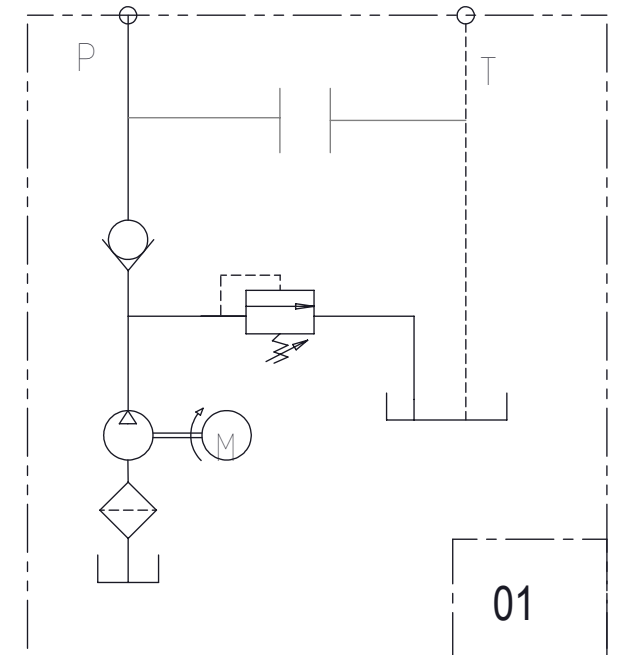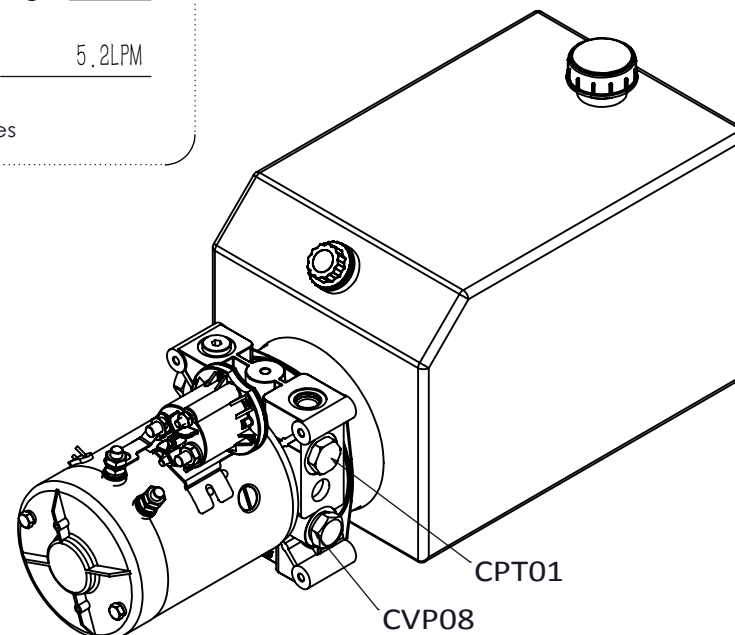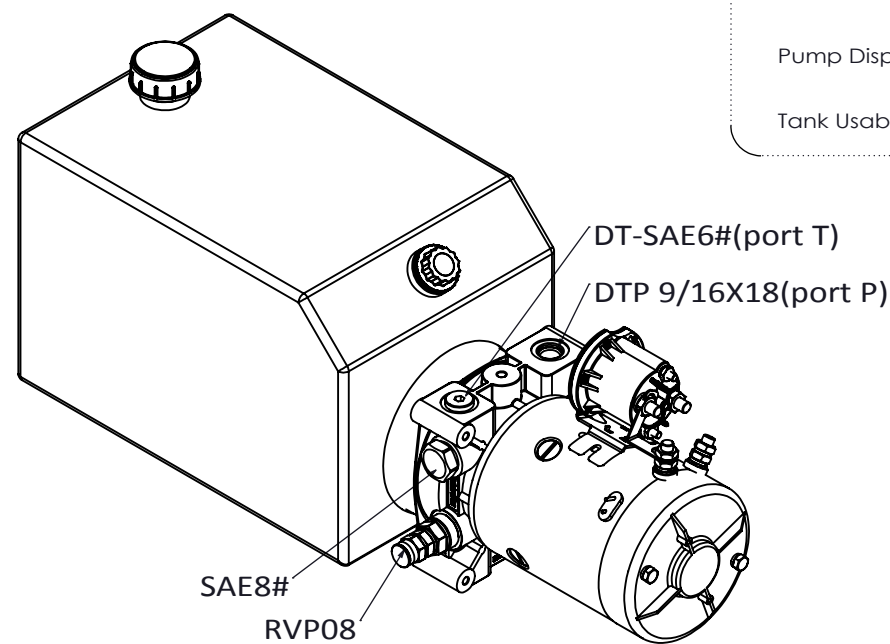

TOLERANCE :mm

- > 0 ±0.1
- > 6 ±0.2
- > 30 ±0.3
- > 120 ±1
- > 315 ±2
- > 1000 ±5

MOCEN

www.mocen.com.cn

SPECIFICATIONS

ELECTRICAL MOTOR	422B-2P-M,DC24V,2.2KW	
FLOW RATE	5.2LPM@1500PSI	
MAX. PRESSURE	3000PSI	
RELIEF SETTING	2500PSI	
GEAR PUMP DISP.	G210T 2.1mL/REV	
RESERVOIR	MT3,STEEL,10L	
REMOTE CONTROL	N/A	
MOUNTING	VERTICAL OR HORIZONTAL	
PORTING	SAE6#	
DESIGNED_BY KMC	APPROVAL_BY ***	APPROVAL DATE. 2017/02/10
UNIT:[inch]mm		REFER TO

CUSTOMER 16DB010H213B	Material number 010101-0108	SCALE
--------------------------	--------------------------------	-------

HYDRAULIC POWER UNIT

16D01-022	REVISION D	PAGES /
------------------	---------------	------------