

1

2

3

4

5



<<<< CUSTOMER APPROVAL >>>>
THIS DRAWING IS BEING SUBMITTED FOR YOUR APPROVAL OF THIS DESIGN ON YOUR APPLICATION AND REQUIRMENTS.
A SIGNATURE IS REQUIRED BEFORE AN ORDER CAN BE PROCESSED.
APPROVED BY _____ APPROVAL DATE _____/_____/_____

6

7





8

REV	DESCRIPTION	DATE	SIGNATURE	CHECKED
XXX	XXX	00/00/00	XXX	XXX

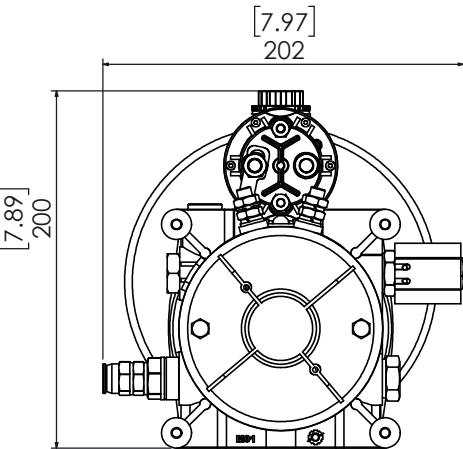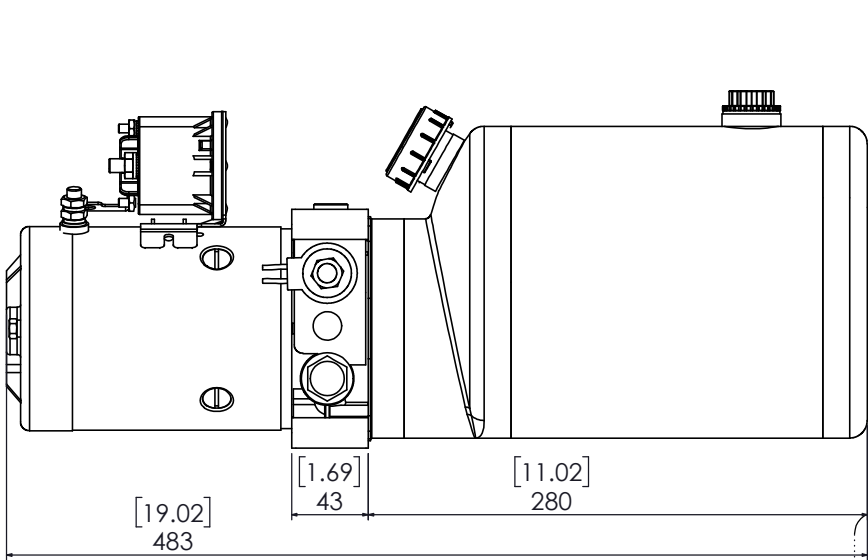

Network 标签

MODEL	16DB030H211A		
Relief Valve Setting	2500PSI		
Motor(KW)	2.2KW	Voltage	24V
Pump Disp	2.1ML	Flow	5.2LPM
Tank Usable	3.8	Litres	

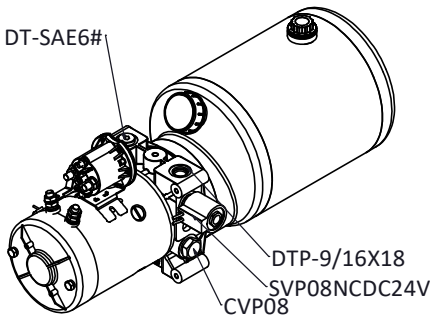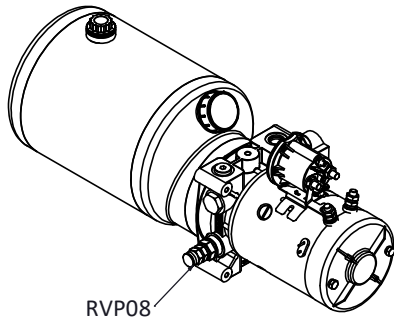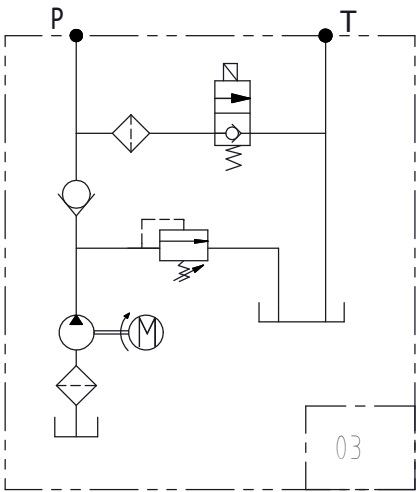

SPECIFICATIONS	
ELECTRICAL MOTOR	422B-2P-M,DC24V,2.2KW
FLOW RATE	5.2LPM@1500PSI
MAX. PRESSURE	3000PSI
RELIEF SETTING	2500PSI
GEAR PUMP DISP.	G210T,2.1ML/REV
RESERVOIR	LS1,STEEL,1GAL
REMOTE CONTROL	N/A
MOUNTING	VERTICAL OR HORIZONTAL
PORTING	SAE6#

DESIGNED BY KMC	CHECKED BY X	APPROVAL DATE 2020/9/8
REFER TO		
CUSTOMER 16DB030H211A	Material number 010101-0105	SCALE
HYDRAULIC POWER UNIT		
16D03-024		REVISION F SHEET 1:5