



12345

<<<< CUSTOMER APPROVAL >>>>

THIS DRAWING IS BEING SUBMITTED FOR YOUR APPROVAL OF THIS DESIGN ON YOUR APPLICATION AND REQUIRMENTS.
A SIGNATURE IS REQUIRED BEFORE AN ORDER CAN BE PROCESSED.

APPROVED BY _____ APPROVAL DATE ____/____/____

REV	DESCRIPTION	DATE	SIGNATURE	CHECKED
XXX	XXX	00/00/00	XXX	XXX

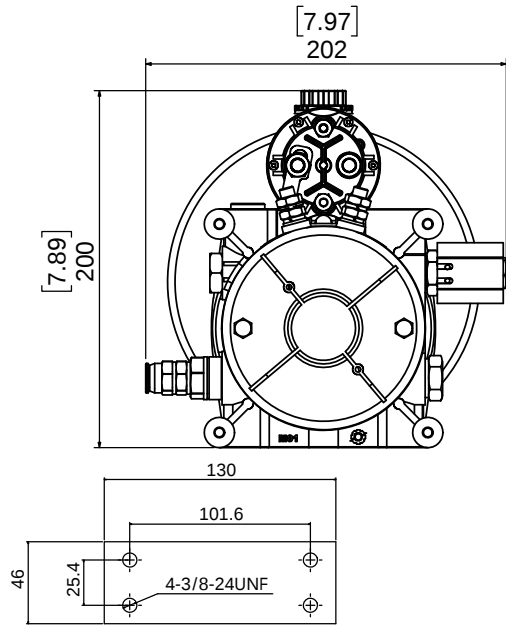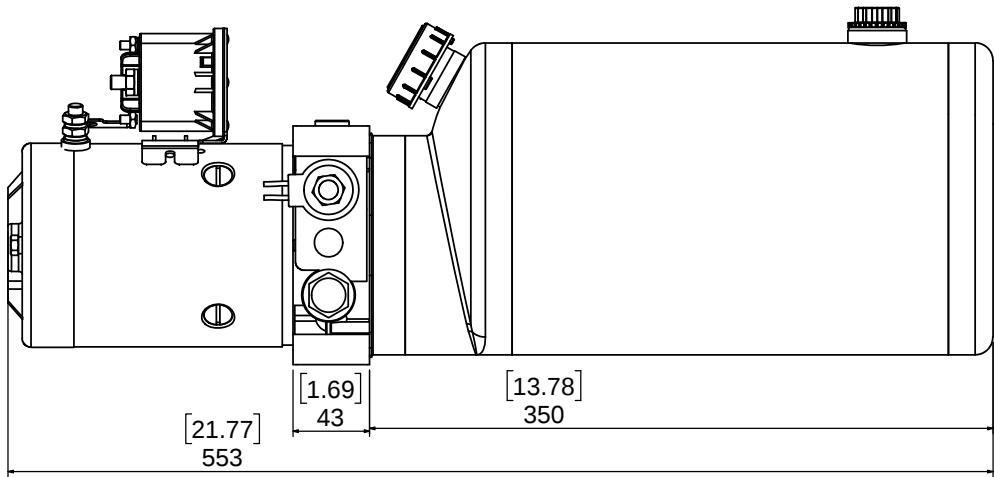

Network 标签

MODEL16DB030H212A



Relief Valve Setting2500PSI

Motor(KW)2.2KWVoltage24V

Pump Disp2.1MLFlow5.2LPM

Tank Usable5.7Litres

SPECIFICATIONS	
ELECTRICAL MOTOR	422B-2P-M,DC24V,2.2KW
FLOW RATE	5.2LPM@1500PSI
MAX. PRESSURE	3000PSI
RELIEF SETTING	2500PSI
GEAR PUMP DISP.	G210T,2.1ML/REV
RESERVOIR	LS2,STEEL,1.5GAL
REMOTE CONTROL	N/A
MOUNTING	VERTICAL OR HORIZONTAL
PORTING	SAE6#

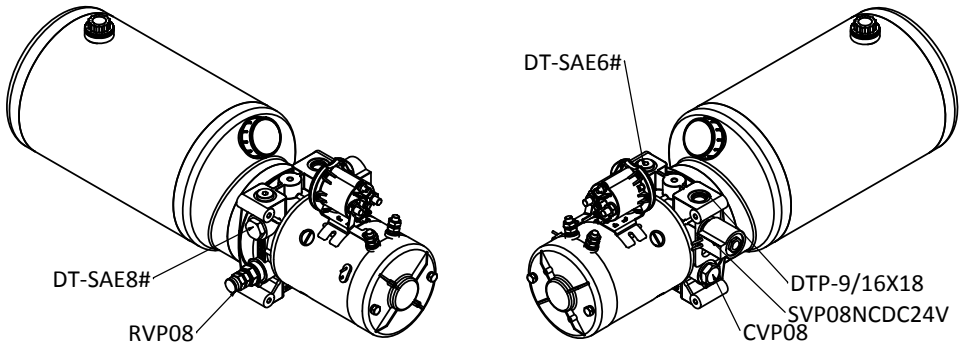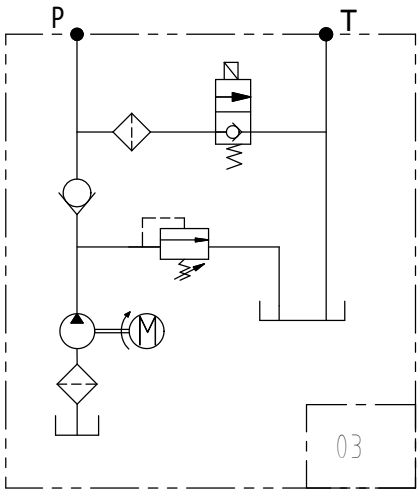

MCCEN

FLUID POWER & CONTROLS

DESIGNED BY
KMC

CHECKED BY
X

APPROVAL DATE
2020/4/7

REFER TO

CUSTOMER
16DB030H212A

Material number
010101-0104

SCALE

HYDRAULIC POWER UNIT

16D03-026

REVISION
G

SHEET
1:5