
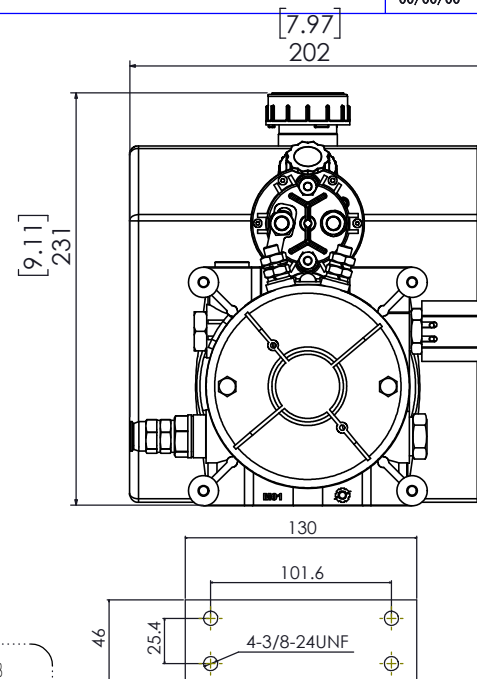


THIS DRAWING IS BEING SUBMITTED FOR YOUR APPROVAL OF THIS DESIGN ON YOUR APPLICATION AND REQUIREMENTS.
A SIGNATURE IS REQUIRED BEFORE AN ORDER CAN BE PROCESSED.

REV	DESCRIPTION	DATE	SIGNATURE	CHECKED
XXX	XXX	00/00/00	XXX	XXX

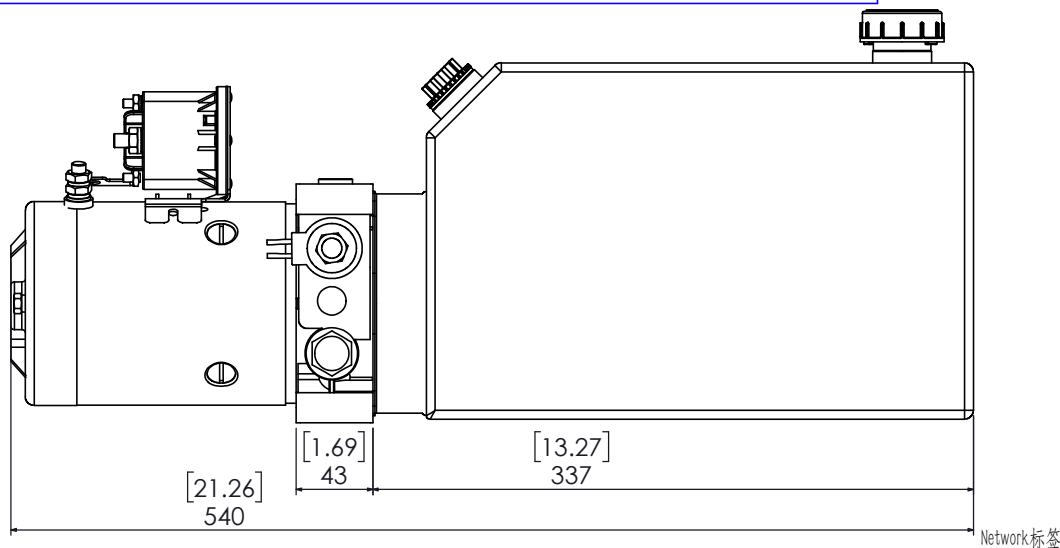




MODEL 16DB030H213B

Relief Valve Setting 2500PSI

Motor(KW) 2.2KW **Voltage** 24V

Pump Disp 2.1ML **Flow** 5.2LPM

Tank Usable 10 **Litres**

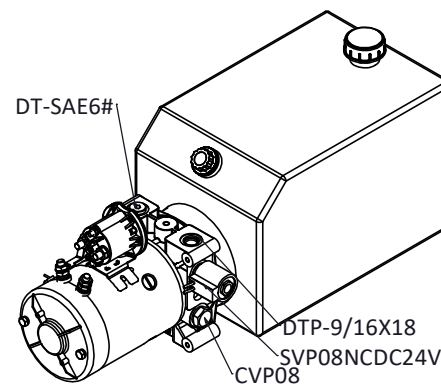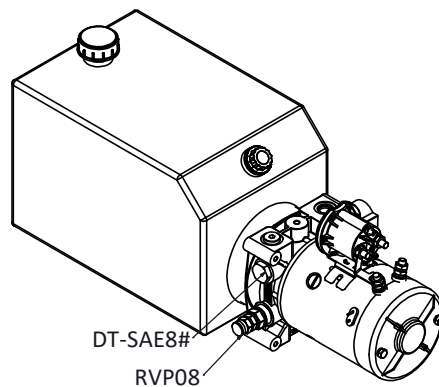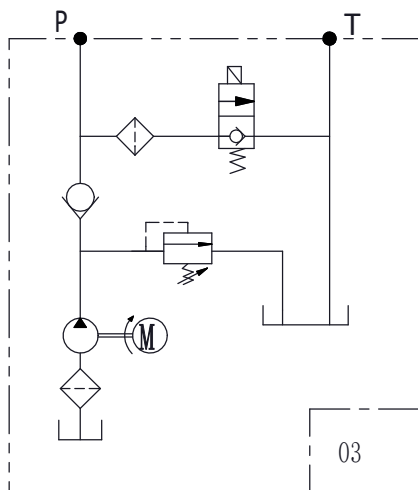

SPECIFICATIONS	
ELECTRICAL MOTOR	422B-2P-M,DC24V,2.2KW
FLOW RATE	5.2LPM@1500PSI
MAX. PRESSURE	3000PSI
RELIEF SETTING	2500psi
GEAR PUMP DISP.	G210T,2.1ML/REV
RESERVOIR	MT3,STEEL,2.5GAL
REMOTE CONTROL	N/A
MOUNTING	VERTICAL OR HORIZONTAL
PORTING	SAE6#



DESIGNED_BY KMC	CHECKED_BY X	APPROVAL DATE. 2020/5/7	
		REFER TO	
CUSTOMER 16DB030H213B	Material number 010101-0100	SCALE	
HYDRAULIC POWER UNIT			
16D03-040		REVISION C	SHEET 1:5