



12345

<<<< CUSTOMER APPROVAL >>>>

THIS DRAWING IS BEING SUBMITTED FOR YOUR APPROVAL OF THIS DESIGN ON YOUR APPLICATION AND REQUIRMENTS.
A SIGNATURE IS REQUIRED BEFORE AN ORDER CAN BE PROCESSED.

APPROVED BY _____ APPROVAL DATE ____/____/____

REV	DESCRIPTION	DATE	SIGNATURE	CHECKED
XXX	XXX	00/00/00	XXX	XXX

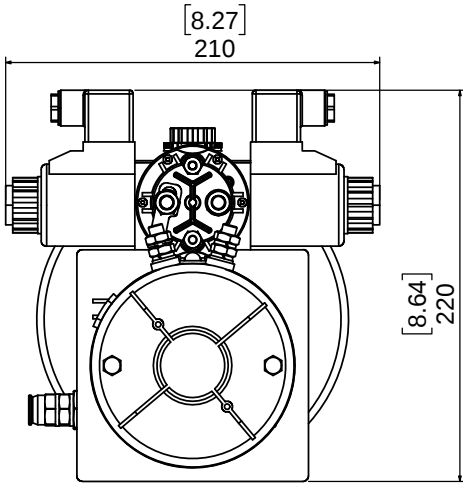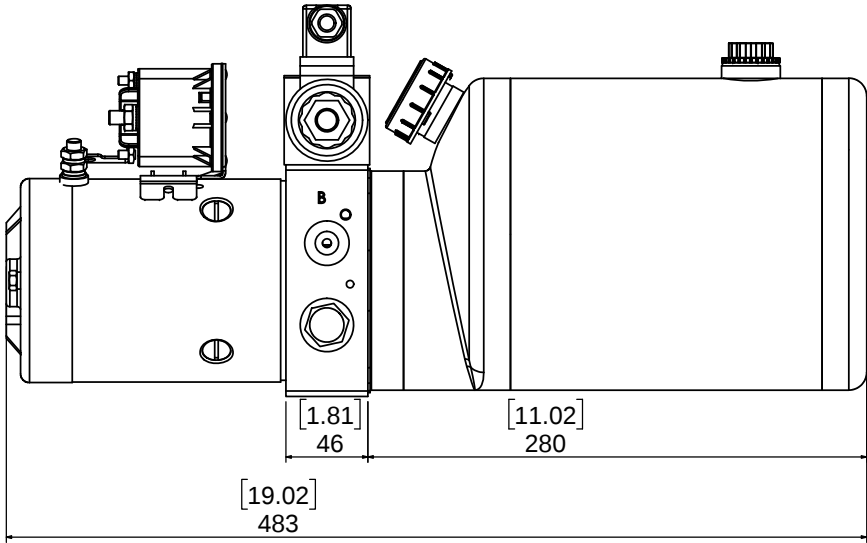

Network 标签

MODEL

16DB131ZH211A

ReliefValve Setting

2500PSI

Motor(KW)

2.2KW

voltge

24V

Pump Disp

2.1ML




Flow

5.2LPM

Tank Usable

3.7

Litres

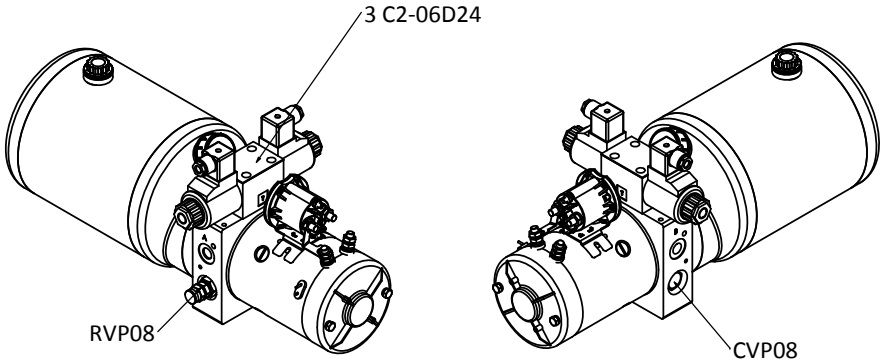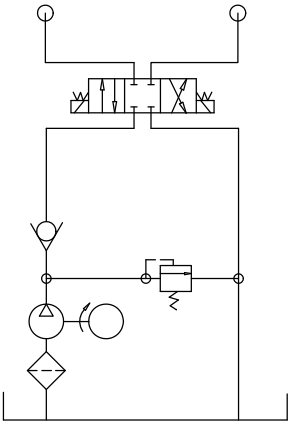

SPECIFICATIONS	
ELECTRICAL MOTOR	422B-2P-M 2.2KW DC24V
FLOW RATE	5.2LPM@1500psi
MAX. PRESSURE	3000psi
RELIEF SETTING	2500psi
GEAR PUMP DISP.	G210 2.1mL/REV
RESERVOIR	LS1A,STEEL, 1.0GAL
REMOTE CONTROL	N/A
MOUNTING	VERTICAL OR HORIZONTAL
PORTING	SAE6#



DESIGNED BY KMC	CHECKED BY X	APPROVAL DATE. 2020/2/12
REFER TO		
CUSTOMER 16DB131ZH211A	FILE NAME *	SCALE
HYDRAULIC POWER UNIT		
16D130-037	REVISION E	SHEET 1:5