

1 2 3 4 5



<<<< CUSTOMER APPROVAL >>>>

THIS DRAWING IS BEING SUBMITTED FOR YOUR APPROVAL OF THIS DESIGN ON YOUR APPLICATION AND REQUIRMENTS.

A SIGNATURE IS REQUIRED BEFORE AN ORDER CAN BE PROCESSED.


APPROVED BY _____ APPROVAL DATE _____/_____/_____

REV	DESCRIPTION	DATE	SIGNATURE	CHECKED
XXX	XXX	00/00/00	XXX	XXX

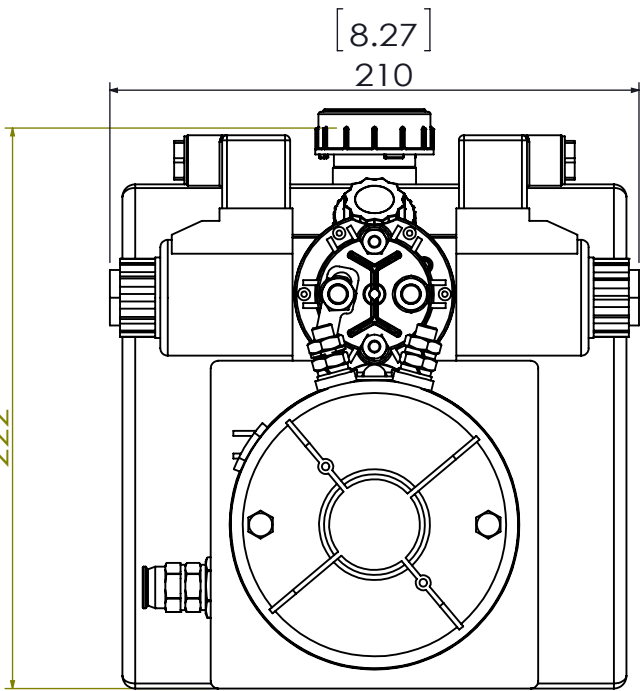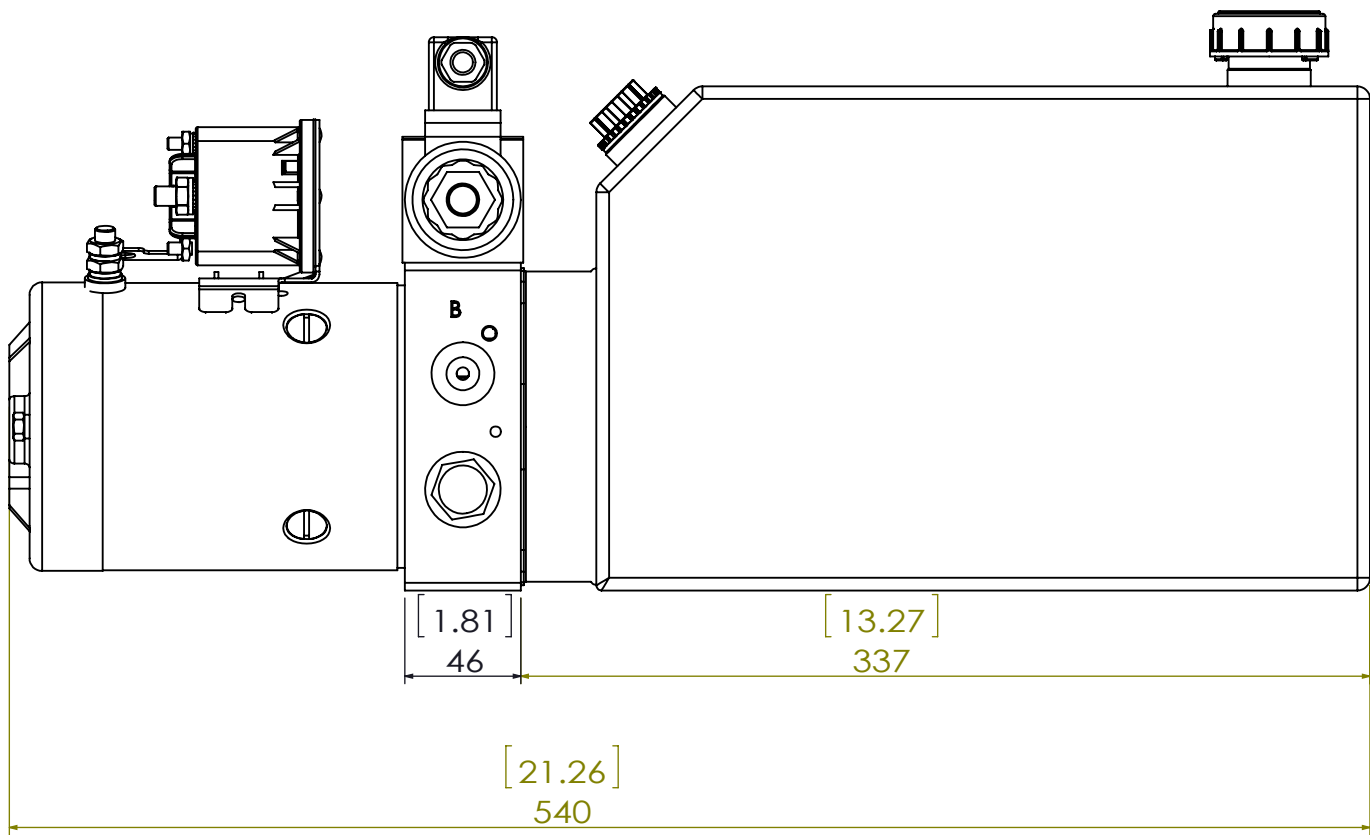

Network 标签

MODEL	16DB131ZH213B		
Relief Valve Setting	2500PSI		
Motor(KW)	2.2KW	Voltage	24V
Pump Disp	2.1ML	Flow	5.2LPM
Tank Usable	10	Litres	

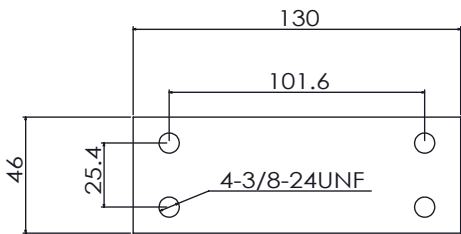

SPECIFICATIONS

ELECTRICAL MOTOR	422B-2P-M,DC24V,2.2KW
FLOW RATE	5.3LPM@1500psi
MAX. PRESSURE	3000psi
RELIEF SETTING	2500psi
GEAR PUMP DISP.	G210T 2.1mL/REV
RESERVOIR	MT3A,STEEL, 9.5L
REMOTE CONTROL	N/A
MOUNTING	VERTICAL OR HORIZONTAL
PORTING	SAE6#



DESIGNED BY KMC	CHECKED BY X	APPROVAL DATE. 2018/07/25
--------------------	-----------------	------------------------------

REFER TO		
CUSTOMER 16DB131ZH213B	FILE NAME *	SCALE 1 : 3

HYDRAULIC POWER UNIT

16D130-042	REVISION c	SHEET 1 : 3
------------	---------------	----------------

