
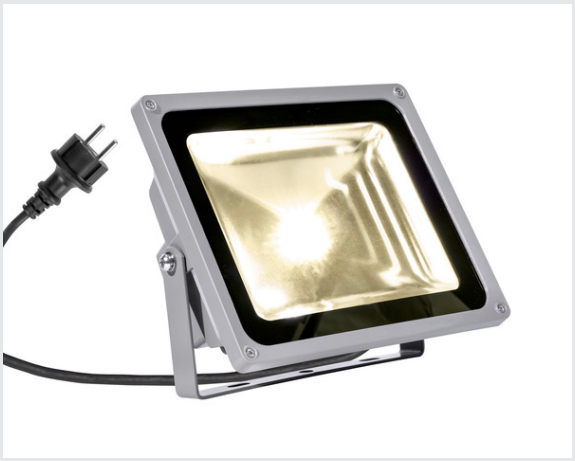


LED OUTDOOR BEAM

warm white, 50W, 3000K, 100°, IP65

Powerful OUTDOOR BEAM spot for illuminating areas and spaces. With a tiltable installation bracket and protection class IP65, the spot is suitable for outdoor installation on the wall, ceiling or on the floor. The electrical connection of the spot, which is available in warm white and neutral white, is made directly by the built-in driver and the connection lead with mains plug to the 230V mains supply. A wall bracket is available as an option for simplified wall installation.



TECHNICAL DATA

Item no.	1001638
Rotating or tilting	tiltable
IP Code	IP 65
Impact resistance class	IK 04
Impact resistance	0.5 Joule
Assembly	Surface
Assembly details	Ceiling,Ground,Wall
Primary nominal voltage	220-240V ~50/60Hz
Secondary power / voltage	640 mA
Safety class	I
Wattage	54 W
Maximum ambient temperature	40 °C
Lumen	5100 lm
Colour temperature	3000 Kelvin
Beam angle	100 °
Color	grey
CRI	80
LXXBXX data	L70B50
Service life	30000 h
Light distribution	symmetric
Light outlet	direct
Length	28.6 cm

Width	15 cm
Height	23.6 cm
Net weight	3.712 kg
Gross weight	4.077 kg

Accessories

234354	WALL MOUNTING BRACKET , for OUTDOOR BEAM and MILOX, silver, 80 cm
234344	WALL MOUNTING BRACKET , for OUTDOOR BEAM and MILOX, silver, 50 cm