



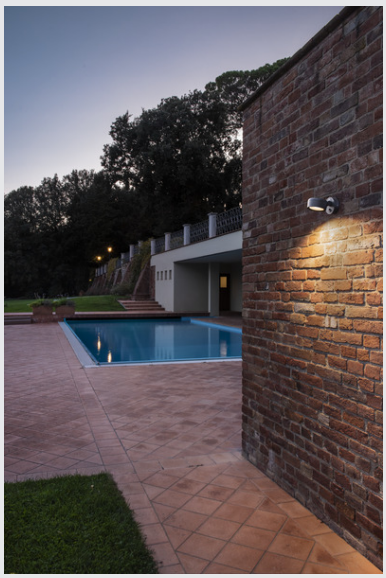

ESKINA SENSOR

Outdoor surface-mounted wall and ceiling light, anthracite, 3000/4000 K, IP54

A new family in the SLV lighting world! We are providing you with an integrated outdoor lighting solution with the ESKINA family. Regardless of whether it is a floor stand, a wall and ceiling light or a display fitting. You will find the right light for any application. All of the luminaires can be operated with 3000 K or 4000 K. Versions with motion sensors are also available.



TECHNICAL DATA

Item no.	1002904
Rotating or tilting	rotary bar and tiltable
IP Code	IP54
Impact resistance class	IK 02
Impact resistance	0.2 Joule
Number of through-wires	20
Primary nominal voltage	220-240V ~50/60 Hz
Secondary power / voltage	350 mA
Safety class	I
Wattage	15 W
Level of inrush current	30 A
Duration of inrush current	40 µs
Lumen	1000 lm
Colour temperature	3000/4000 Kelvin
Beam angle	95 °
Color	anthracite
CRI	80
Service life	36000 h
Height	22.3 cm
Diameter	13.8 cm
Net weight	1.279 kg
Gross weight	1.591 kg

Light Source

916405	

BIG WHITE Page	937