



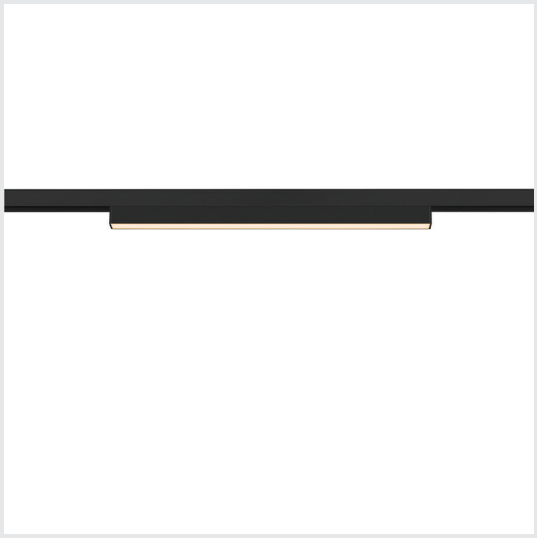

IN-LINE 44 | 48V, opal, DALI

IN-LINE 44 48V TRACK, opal, DALI, spot, black / black, 14 W, 1180 lm, 3000 K, CRI 90, 95°

Plain linear luminaires for a particularly elegant look: the IN-LINE spotlight is concealed within a 48V TRACK system, allowing only the best feature to surface: high-quality light with a 95° beam angle in various lumen and natural colour reproduction (CRI >90). The DALI-compatible IN-LINE linear luminaires are also quick and easy to install via a track adapter.



Light source

2115947	A G E

Item no.	1006623
Lamps included	No
Number of different light outlets	1
IP Code	IP20
Impact resistance class	IK02
Impact resistance	0.2 Joule
Assembly	Track
Assembly details	Ceiling,Wall,
Dimmable	true
Dimming technology	DALI 2
Primary nominal voltage	48V DC
Secondary power / voltage	350 mA
Safety class	III
Wattage	14 W
Minimum ambient temperature	-20°C
Maximum ambient temperature	35°C
Beam angle	95°
Color	black/black
CRI	90
UGR ≤	28
LXXBXX data	L80B50
Service life	50 000 h
Risk Group	1
Length	43.5 cm
Width	2.2 cm
Height	2.5 cm
Net weight	0.29 kg
Gross weight	0.35 kg
BIG WHITE Page	451