



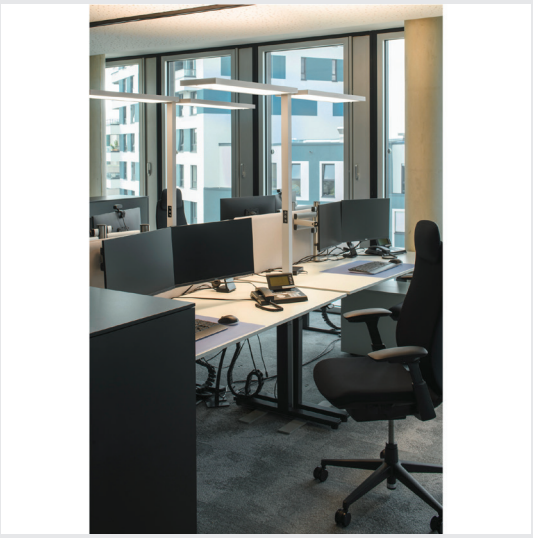

# WORKLIGHT PRO | FL, double

**WORKLIGHT PRO, free-standing lamp, 150 W, 4000 K, Touch, white**

The new WORKLIGHT PRO stands for high performance in the workplace: the free-standing lamp is optimally designed in line with the latest DIN EN 12464:2021 standard. Its glare-free (UGR <14) luminous efficiency of 130 lm/W, a colour temperature of 4000 K and improved, indirect light output offers everything you need for an ergonomic working environment. Dimmability, daylight control, a motion sensor and long lifespan (L80/B10 50,000h) also help to make the free-standing office lamp what it is: a true SLV colleague that assists with productivity.




## Light source

| | |
|---|---|
| 1807475 | D |
| 1807479 | C |

| | |
|---|---|
| Item no. | 1007466 |
| Lamps included | No |
| Number of different light outlets | 2 |
| IP Code | IP20 |
| Impact resistance class | IK03 |
| Impact resistance | 0.35 Joule |
| Assembly | Mobile |
| Assembly details | Ground, |
| Dimmable | true |
| Dimming technology | Touch |
| Primary nominal voltage | 200-240V ~ 0/50/60Hz |
| Secondary power / voltage | 48 V |
| Safety class | I |
| Wattage | 150 W |
| Minimum ambient temperature | -20°C |
| Maximum ambient temperature | 45°C |
| Number of luminaires at LS B16A | 3.0 |
| Number of luminaires at LS C16A | 5.0 |
| Level of inrush current | 72 A |
| Duration of inrush current | 410 µs |
| Beam angle | 75° |
| Color | white/white |
| CRI | 80 |
| UGR ≤ | 16 |
| LXXBXX data | L80B10 |
| Service life | 50 000 h |
| Risk Group | 0 |
| Length | 163.4 cm |
| Width | 24 cm |