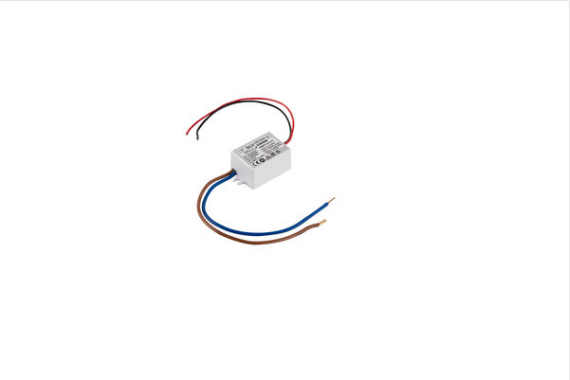


LED driver 4 W

700 mA

Very compact constant current driver with 1-4 W and 700 mA, version with open cable ends. Suitable for box installation.

TECHNICAL DATA

Item no.	1008657
IP Code	IP20
Primary nominal voltage	100-240V ~50/60 Hz
Secondary power / voltage	700 mA
Safety class	II
Safety class	II
Wattage	4.9 W
Minimum ambient temperature	-25 °C
Maximum ambient temperature	50 °C
Number of luminaires at LS B16A	58
Number of luminaires at LS C16A	96
Level of inrush current	10 A
Duration of inrush current	96 µs
Color	white
Depth	0 cm
Net weight	0.037 kg
Gross weight	0.043 kg
BIG WHITE Page	119