
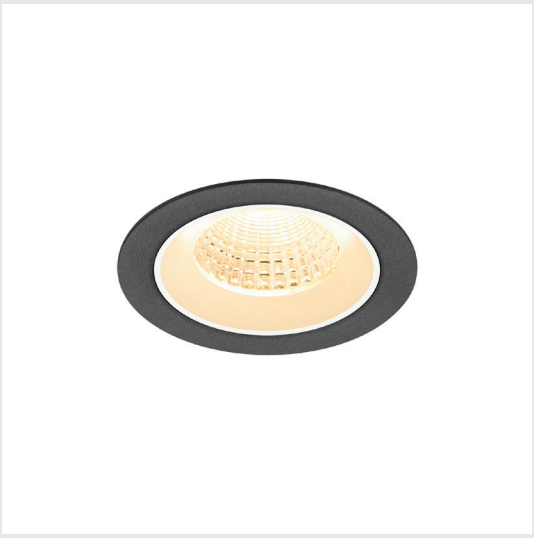


NUMINOS® M | DL

NUMINOS® M, Recessed ceiling light, 3000 K, 55°, IP20, round, black / white

NUMINOS is the perfectly coordinated light system from SLV that combines function, design and technology. With various downlights and spotlights, you can experience a thousand lighting design possibilities. This also includes NUMINOS® DL M, which impresses as a recessed ceiling light with the best workmanship and lighting quality. Ideal for discreet, modern and space-saving lighting that directs the accent to objects or the room. The recessed ceiling light has a power consumption of 12 watts, a luminous flux of 1800 lumens, a colour temperature of 3000 Kelvin and a high colour reproduction index of over 90. Installation is then done in no time at all. When will you choose SLV's modular variety?



Light source

2093856	A G D

Item no.	1009620
Lamps included	No
Number of different light outlets	1
IP Code	IP20
Assembly	Recessed
Assembly details	Ceiling,
Secondary power / voltage	350 mA
Safety class	III
Wattage	12 W
Minimum ambient temperature	-20°C
Maximum ambient temperature	40°C
Beam angle	55°
Color	black/white
CRI	90
UGR ≤	22
LXXBXX data	L90B10
Service life	50 000 h
Risk Group	1
Height	6.8 cm
Diameter	10.5 cm
Net weight	0.22 kg
Gross weight	0.28 kg
Shape of cut-out	round
Installation depth	7,5 cm
Installation diameter	9 cm

Accessories

1010696	LED driver, 21W, 350 mA
1010700	LED driver, 20W, 350 mA, PHASE
1010704	LED driver, 23W, 350 mA, DALI
1010129	NUMINOS® M, reflector, gold
1010130	NUMINOS® M, reflector, copper
1010683	NUMINOS® M, Honeycomb diffuser
1010684	NUMINOS® M, Prismatic diffuser
1010685	NUMINOS® M, frosted diffuser
1010686	NUMINOS® M, Elliptical diffuser
1006139	Numinos® S Reducing ring, round 160/90 mm black
1006140	Numinos® S Reducing ring, round 160/90 mm white
1006141	Numinos® S Reducing ring, square 160/90 mm black
1006142	Numinos® S Reducing ring, square 160/90 mm white