
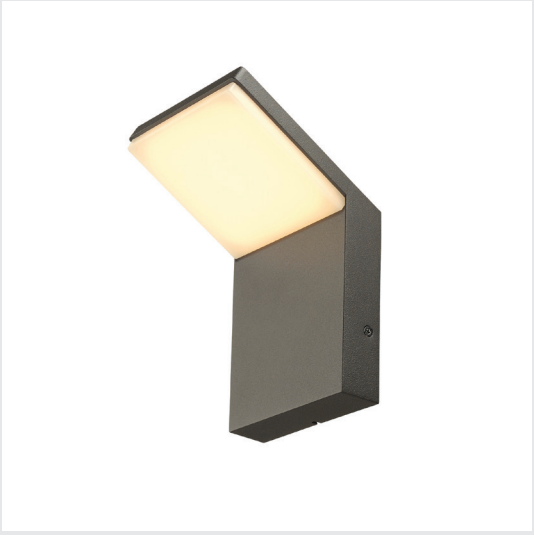


ORDI | WL

ORDI, WL, surface-mounted wall luminaire, 2700/3000 K, 6/8.5 W, IP54, anthracite

The wall-mounted luminaire from the ORDI product line is suitable for use in indoor and protected outdoor areas, featuring an IP54 rating for protection against dust and splashing water. The housing is made of robust aluminium and offers an impact resistance class of IK07, ensuring high durability against mechanical influences. With a compact design measuring 16.5 cm in height, 10 cm in width, and 10.4 cm in depth, the luminaire is easy to install. It provides a luminous flux of 600/850 lumens with a declared lifespan of 50,000 hours, ensuring long-lasting and reliable illumination. This luminaire is particularly suitable for applications requiring resilient and durable wall lighting.



Item no.	1011572
IP Code	IP54
Impact resistance class	IK07
Impact resistance	2 Joule
Assembly	Surface
Assembly details	Wall,
Number of through-wires	160
Primary nominal voltage	100-240V ~ 50/60Hz
Secondary power / voltage	110 mA
Safety class	I
Wattage	6 W
Minimum ambient temperature	-20°C
Maximum ambient temperature	40°C
Number of luminaires at LS B16A	210.0
Number of luminaires at LS C16A	210.0
Level of inrush current	7.2 A
Duration of inrush current	92 µs
Temperature at glass (light emission)	50
Color	anthracite
CRI	80
LXXBXX data	L90B10
Service life	50 000 h
Risk Group	0
Width	10 cm
Height	16.5 cm
Depth	10.4
Net weight	0.39 kg
Gross weight	0.57 kg
BIG WHITE Page	844