
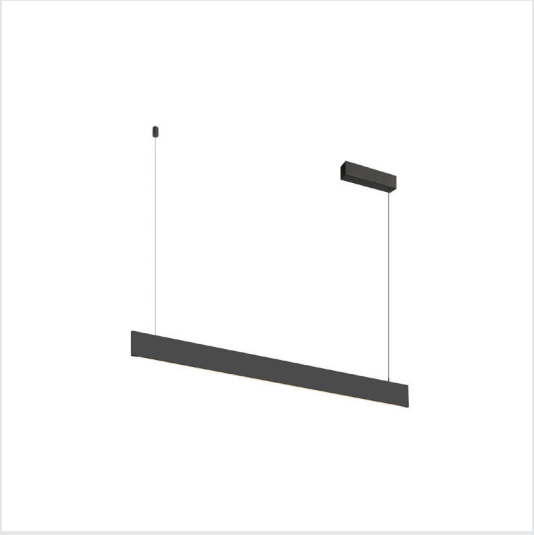


LINIUS 120 | PD, PHASE, CANOPY

LINIUS 120, PD, PHASE, CEILING ROSE, pendant luminaire, 3000 K, 34 W, 90°, black

The LINIUS 120 pendant luminaire is designed for indoor use and is particularly suitable for offices, conference rooms, or representative areas. It features a luminous flux of 3100 lumens with a colour temperature of 3000 K and a beam angle of 90°. The luminaire is equipped with PHASE-cut dimming, allowing flexible light control. The housing is made of aluminium and steel and is fitted with a rectangular canopy. With a length of 121 cm and a suspension length of 200 cm, it offers an elegant and functional lighting solution. The IP20 protection rating and IK02 impact resistance ensure a robust design for indoor applications.



Item no.	1011936
IP Code	IP20
Impact resistance class	IK02
Assembly	Surface
Assembly details	Ceiling suspended,
Dimmable	true
Dimming technology	trailing edge
Number of through-wires	64
Primary nominal voltage	220-240V ~ 0/50/60Hz
Secondary power / voltage	900
Safety class	I
Wattage	34 W
Minimum ambient temperature	0°C
Maximum ambient temperature	45°C
Number of luminaires at LS B16A	64.0
Number of luminaires at LS C16A	128.0
Level of inrush current	15 A
Duration of inrush current	10 µs
Beam angle	90°
Color	black
CRI	90
LXXBXX data	L80B20
Service life	50 000 h
Risk Group	0
Length	121 cm
Width	0.8 cm
Height	7.9 cm
Pendant length	200.0000 cm
Net weight	2.65 kg