
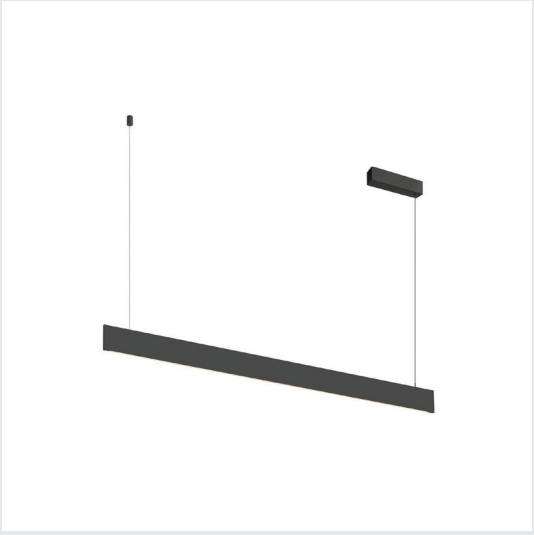


# LINIUS 150 | PD, PHASE, CANOPY

**LINIUS 150, PD, PHASE, CEILING ROSE, pendant luminaire, 2700 K, 40 W, 90°, black**

The LINIUS 150 pendant light is designed for indoor use and is particularly suitable for ceiling mounting above tables or in open areas. It provides a luminous flux of 3350 lumens at a colour temperature of 2700 K and a beam angle of 90°. The luminaire features phase-cut dimming, allowing for stepless light control. The housing is made of aluminium and steel and is finished in black. The rectangular ceiling rose supports installation, while the pendant length of 200 cm offers flexible mounting options. The luminaire has an IP20 rating and an impact resistance class of IK02, making it suitable for protection against mechanical impacts indoors. The compact installation height is 7.9 cm, with a length of 150 cm and a width of 0.76 cm.




| | |
|---|---|
| Item no. | 1011942 |
| IP Code | IP20 |
| Impact resistance class | IK02 |
| Assembly | Surface |
| Assembly details | Ceiling suspended, |
| Dimmable | true |
| Dimming technology | trailing edge |
| Number of through-wires | 64 |
| Primary nominal voltage | 220-240V ~ 0/50/60Hz |
| Secondary power / voltage | 1050 |
| Safety class | I |
| Wattage | 40 W |
| Minimum ambient temperature | 0°C |
| Maximum ambient temperature | 45°C |
| Number of luminaires at LS B16A | 64.0 |
| Number of luminaires at LS C16A | 128.0 |
| Level of inrush current | 15 A |
| Duration of inrush current | 10 µs |
| Beam angle | 90° |
| Color | black |
| CRI | 90 |
| LXXBXX data | L80B20 |
| Service life | 50 000 h |
| Risk Group | 0 |
| Length | 150 cm |
| Width | 0.8 cm |
| Height | 7.9 cm |
| Pendant length | 200.0000 cm |
| Net weight | 2.95 kg |