
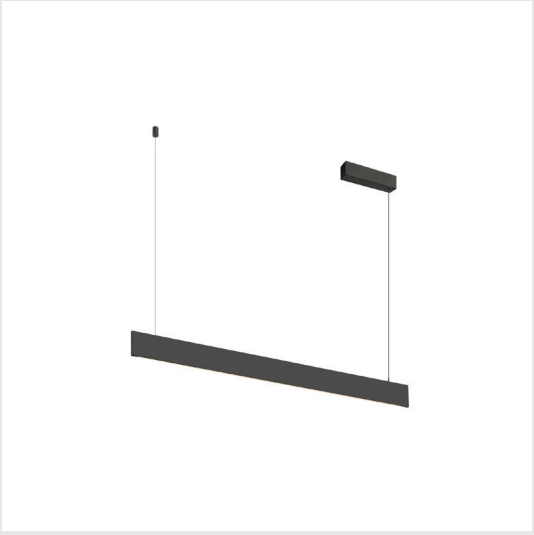


# LINIUS 120 | PD, DALI, CANOPY

**LINIUS 120, PD, DALI, CEILING ROSE, pendant luminaire, 3000 K, 34 W, 90°, black**

The pendant light LINIUS 120 is designed for indoor use and is particularly suitable for office and work areas. It offers a luminous flux of 3100 lumens with a colour temperature of 3000 Kelvin and a beam angle of 90 degrees. The luminaire is equipped with DALI-2 dimming, allowing flexible control of the light intensity. The housing is made of aluminium and features a rectangular ceiling rose for mounting. With a length of 121 cm, a height of 7.9 cm, and a suspension length of 200 cm, it has a slim design. The protection rating IP20 and impact resistance class IK02 ensure reliable operation in protected indoor environments. The declared service life is 50,000 hours.




| | |
|---|---|
| Item no. | 1011952 |
| IP Code | IP20 |
| Impact resistance class | IK02 |
| Assembly | Surface |
| Assembly details | Ceiling suspended, |
| Dimmable | true |
| Dimming technology | DALI 2 |
| Number of through-wires | 15 |
| Primary nominal voltage | 220-240V ~ 0/50/60Hz |
| Secondary power / voltage | 900 |
| Safety class | I |
| Wattage | 34 W |
| Minimum ambient temperature | 0°C |
| Maximum ambient temperature | 45°C |
| Number of luminaires at LS B16A | 15.0 |
| Number of luminaires at LS C16A | 24.0 |
| Level of inrush current | 65 A |
| Duration of inrush current | 200 µs |
| Beam angle | 90° |
| Color | black |
| CRI | 90 |
| LXXBXX data | L80B20 |
| Service life | 50 000 h |
| Risk Group | 0 |
| Length | 121 cm |
| Width | 0.8 cm |
| Height | 7.9 cm |
| Pendant length | 200.0000 cm |
| Net weight | 2.65 kg |