
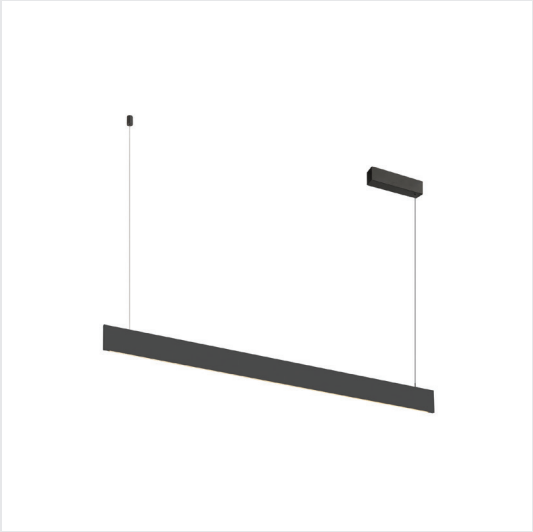


LINIUS 150 | PD, DALI, CANOPY

LINIUS 150, PD, DALI, CEILING ROSE, pendant luminaire, 3000 K, 40 W, 90°, black

The pendant luminaire LINIUS 150 is designed for indoor use and is particularly suitable for ceiling mounting with a rectangular ceiling rose. It offers a luminous flux of 3450 lumens at a colour temperature of 3000 K and a beam angle of 90°. The luminaire is equipped with DALI-2 dimming, allowing flexible control. The housing is made of aluminium and measures 150 cm in length, 7.9 cm in height, and 0.76 cm in width. The suspension length is 200 cm. Protection class IP20 and impact resistance IK02 ensure reliable operation in protected indoor areas. The luminaire has a declared lifetime of 50,000 hours.



Item no.	1011960
IP Code	IP20
Impact resistance class	IK02
Assembly	Surface
Assembly details	Ceiling suspended,
Dimmable	true
Dimming technology	DALI 2
Number of through-wires	15
Primary nominal voltage	220-240V ~ 0/50/60Hz
Secondary power / voltage	1050
Safety class	I
Wattage	40 W
Minimum ambient temperature	0°C
Maximum ambient temperature	45°C
Number of luminaires at LS B16A	15.0
Number of luminaires at LS C16A	24.0
Level of inrush current	65 A
Duration of inrush current	200 µs
Beam angle	90°
Color	black
CRI	90
LXXBXX data	L80B20
Service life	50 000 h
Risk Group	0
Length	150 cm
Width	0.8 cm
Height	7.9 cm
Pendant length	200.0000 cm
Net weight	2.95 kg