
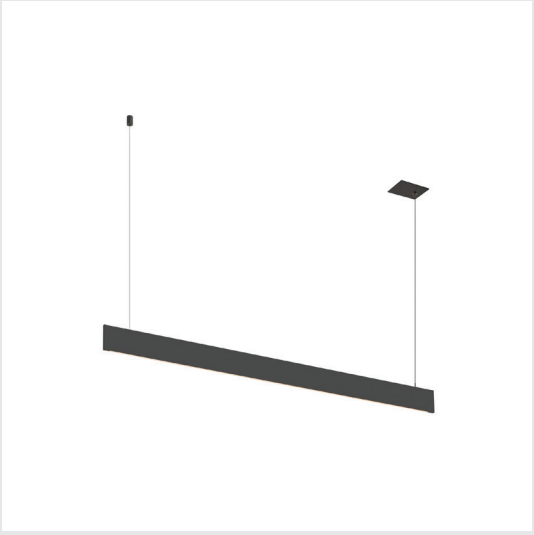


LINIUS 150 | PD, DALI RECESSED

LINIUS 150, PD, DALI, RECESSED, pendant luminaire, 2700 K, 40 W, 90°, black

The LINIUS 150 pendant light is designed for ceiling mounting and is suitable for indoor use. It has a power output of 40 watts and produces a light colour of 2700 Kelvin with a beam angle of 90 degrees. The housing is made of aluminium and finished in black. The luminaire is equipped with a DALI 2 dimming function, allowing flexible light control. With a length of 150 cm, a width of 0.76 cm, and a height of 7.9 cm, it is suitable for various room heights and sizes. The pendant length is 200 cm. Protection class IP20 and impact resistance according to IK02 ensure protection against contact and mechanical effects indoors. The luminaire has a declared service life of 50,000 hours.



Item no.	1011962
IP Code	IP20
Impact resistance class	IK02
Assembly	Recessed
Assembly details	Ceiling,
Dimmable	true
Dimming technology	DALI 2
Number of through-wires	15
Primary nominal voltage	220-240V ~ 0/50/60Hz
Secondary power / voltage	1050
Safety class	II
Wattage	40 W
Minimum ambient temperature	0°C
Maximum ambient temperature	45°C
Number of luminaires at LS B16A	15.0
Number of luminaires at LS C16A	24.0
Level of inrush current	65 A
Duration of inrush current	200 µs
Beam angle	90°
Color	black
CRI	90
LXXBXX data	L80B20
Service life	50 000 h
Risk Group	0
Length	150 cm
Width	0.8 cm
Height	7.9 cm
Pendant length	200.0000 cm
Net weight	2.36 kg