



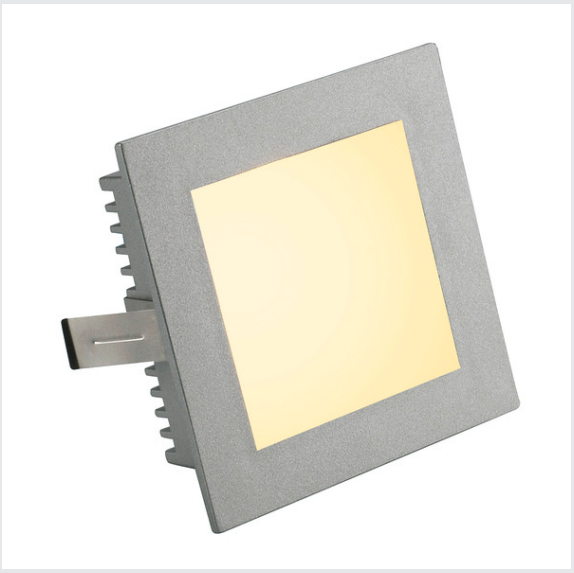

FLAT FRAME BASIC

recessed fitting, QT9, square, silver-grey, max. 20W

With our FLAT FRAME series we offer you a lighting solution for recessed wall and ceiling installation with minimum space requirements. Ready for the use of G4 pin-based lamps, a suitable transformer providing 12V alternating current is required for operation. An installation frame and a wall box are both available on accessory.



TECHNICAL DATA

Item no.	112732
Socket	G4
Lamp	QT9
Number of sockets	1
Lamps included	No
IP Code	IP 20
Assembly	Recessed
Assembly details	Ceiling,Wall
Primary nominal voltage	12V ~50/60Hz
Safety class	III
Wattage	20 W
Color	grey
Light distribution	symmetric
Light outlet	direct
Width	9 cm
Height	9 cm
Depth	3.1 cm
Net weight	0.172 kg
Gross weight	0.23 kg
Shape of cut-out	square
Installation length	7.5 cm
Installation width	7.5 cm

Installation depth	4.5 cm

Accessories

112781	MOUNTING BOX , for FRAME BASIC, FLAT FRAME BASIC, FLAT FRAME CURVE and FRAME CURVE
112780	FLUSH-MOUNTED , FRAME, for FRAME BASIC, FLAT FRAME BASIC, FLAT FRAME CURVE and FRAME CURVE
461060	MINI TRANSFORMER 1 , 60VA, 12V, L/W/H 10.5/3.3/2.2 cm