



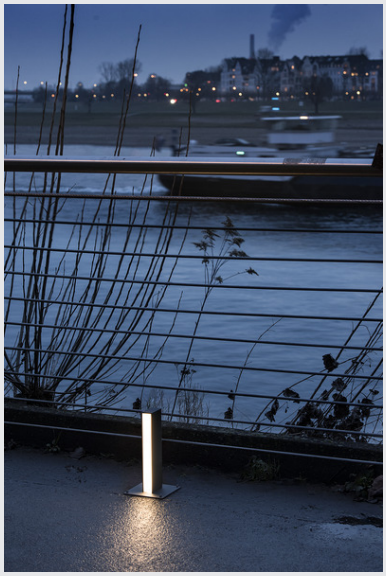

# H-POL

**pathway and floor stand, single-headed, LED, 3000 K, anthracite, L/W/H 16.5/16.5/36 cm**

The H-POL SINGEL indirect radiating floor stand is made of aluminium and plastic. With protection class IP55, it is suitable for outdoor use. Thanks to the 8 W LED, the luminaire is ideal for use as a pathway light. The product is designed for floor installation and is through-wireable. A large mounting pot is available for optimum mounting in the earth. Thanks to the built-in LED driver, it can be connected directly to the 230V mains supply.




## TECHNICAL DATA

| | |
|---|---|
| **Item no.** | 232155 |
| **IP Code** | IP65 |
| **Impact resistance class** | IK 03 |
| **Impact resistance** | 0.35 Joule |
| **Number of through-wires** | 36 |
| **Primary nominal voltage** | 100-277V ~50/60 Hz |
| **Secondary power / voltage** | 480 mA |
| **Safety class** | I |
| **Wattage** | 9.7 W |
| **Minimum ambient temperature** | -20 °C |
| **Maximum ambient temperature** | 40 °C |
| **Level of inrush current** | 5 A |
| **Duration of inrush current** | 25 µs |
| **Lumen** | 350 lm |
| **Colour temperature** | 3000 Kelvin |
| **Beam angle** | 120 ° |
| **Color** | anthracite |
| **CRI** | 80 |
| **Service life** | 30000 h |
| **Length** | 16.5 cm |
| **Width** | 16.5 cm |
| **Height** | 36 cm |

| | |
|---|---|
| 916611 |  |

## Accessories

| | |
|---|---|
| 232195 | MOUNTING POT , for H-POL pathway and floor stand, anthracite |

| | |
|---|---|
| **Net weight** | 1.515 kg |
| **Gross weight** | 2.073 kg |
| **Shape of cut-out** | square |
| **Installation length** | 11.8 cm |
| **Installation width** | 11.8 cm |
| **Installation depth** | 10 cm |
| **BIG WHITE Page** | 788 |