20 Industrial & Floodlights>The IP65 CCT V & PV Range

# 38140ME/V



50W LED CCT Variable & Power variable industrial emergency fitting. Stainless steel clips included. Polycarbonate body and diffuser.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.




## Downloads





## Dimensions

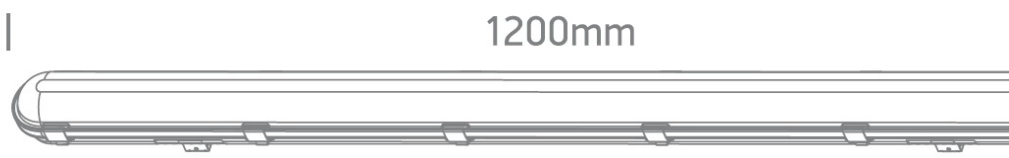


## Gallery





## Physical Specification

| | |
|---|---|
| Item Group | 20 Industrial & Floodlights |
| Family | The IP65 CCT V & PV Range |
| Order Code | 38140ME/V |
| Colour | Grey |
| Material | PC |
| Diffuser Material | PC |
| Shape | Rectangular |

| | |
|---|---|
| Length | 1200mm |
| Width | 77mm |
| Height | 66mm |
| Surface Ceiling | Yes |
| Surface Wall | Yes |
| Indoor | Yes |
| Outdoor | Yes |
| Adjustable | No |
| IK Rating | 8 |

## Electrical Characteristics

| | |
|---|---|
| Gear | Built In |

### Fitting + Driver

| | |
|---|---|
| Input Voltage | 220-240V |
| 50 Hz | Yes |
| 60 Hz | Yes |
| Safety Class | ⏚ |
| Power(Watts) | 28W/36W/42W/50W |
| IP Rating | IP65 |
| Light Source | LED built in |
| Dimmable | No |
| F Mark | Ⓕ |

### Fitting

| | |
|---|---|
| Input Type | Constant Current |
| Input Current | 350mA |
| IP Rating | IP65 |
| Light Source | LED built in |
| LED Type | SMD 2835 |

## Gear

| | |
|---|---|
| Gear Type | Led Driver |
| Input Voltage | 220-240V |
| 50 Hz | Yes |
| 60 Hz | Yes |
| IP Rating | IP20 |
| Dimmable | No |
| Operation Time | 3 Hours |
| Charging Time | 16 Hours |
| Maintained | Yes |
| Non Maintained | Yes |

## Illumination Data

| | |
|---|---|
| Colour Temperature | 3000K-4000K-6500K |
| Lumen Output | 5000lm @ 50W |
| Light Efficiency | 100lm/W |
| CRI | 80 |
| Illumination Diagram |  |

## Packing Info

| | |
|---|---|
| Box Weight | 1.830kg |
| Pcs/Carton | 12 |
| Barcode | 5291889083108 |
| HS Code | 9405114090 |

## Certification & Warranty

| | |
|---|---|
| Warranty | 3 years |