05 Downlights Fixed>The IP65 Recessed Panels 600x600mm

50140BW/W/V



60x60 backlit IP65 recessed CCT Variable LED panel for T-rail false ceilings. Can be recessed or suspended. Uniform lighting, ideal for commercial applications.

Complete with 950mA driver.


Complies with standard EN60598-1 and any other specific standards.

IP65 CCT V 80 CRI CE

Downloads

IES CE

Dimensions

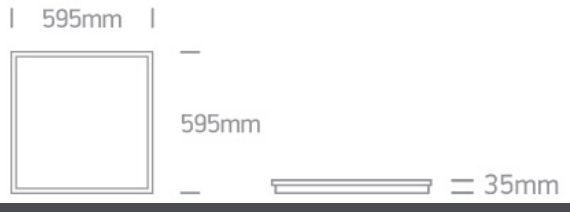

Related items



050017



050108

Physical Specification

Item Group	05 Downlights Fixed
Family	The IP65 Recessed Panels 600x600mm
Order Code	50140BW/W/V
Colour	White
Material	Aluminium + Steel
Shape	Rectangular
Length	595mm

Width	595mm
Height	35mm
Recessed T-Ceiling	Yes
Depth Required	60mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	40W
IP Rating	IP65
Light Source	LED built in
Dimmable	No
F Mark	

Fitting

Input Type	Constant Current
Input Current	950mA
Safety Class	
IP Rating	IP65
Light Source	LED built in
LED Type	SMD 2835

Gear

Gear Type	Led Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Constant Current	Yes
IP Rating	IP65
Safety Class	
Dimmable	No
Brand	Yingjiao
Protection	No-Load, Short Circuit

Illumination Data

Colour Temperature	3000K-4000K-5700K
Lumen Output	4000lm
Light Efficiency	100lm/W
CRI	80
Illumination Diagram	

Packing Info

Box Weight	2.250kg
Pcs/Carton	4
Barcode	5291889077121
HS Code	9405119090

Certification & Warranty

Warranty	3 years