13 Wall & Ceiling LED>Outdoor Slim Oval Range Up & down beam

67378A/AN/W



2x6W LED wall light, IP54, ideal for both indoor and outdoor installation.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.

IP54 80 CRI CE

Downloads

IES CE

Dimensions

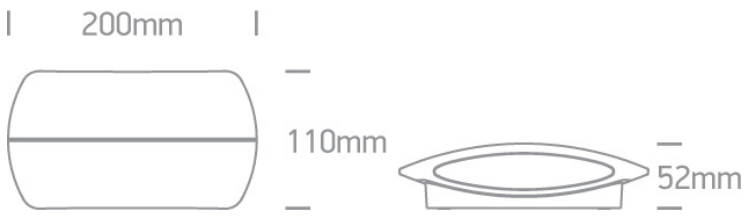

Physical Specification

Item Group	13 Wall & Ceiling LED
Family	Outdoor Slim Oval Range Up & down beam
Order Code	67378A/AN/W
Colour	Anthracite
Material	Die Cast
Shape	Rectangular
Length	200mm
Width	110mm
Height	52mm
Surface Wall	Yes
Indoor	Yes
Outdoor	Yes

Electrical Characteristics

Gear	Built In

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	2x6W
IP Rating	IP54
Light Source	LED built in
Dimmable	No
F Mark	

Fitting

Input Type	Constant Current
Input Current	300mA
Voltage	38V
Power(Watts)	11,4W
IP Rating	IP54
Light Source	LED built in
LED Type	SMD 5630
LED Brand	Edison
LED Number	24

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	7,8-12W

Power Factor	0,5
Constant Current	Yes
300mA	26-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	50ºC
Operating Temp	75ºC
Housing Material	Plastic
Output Terminal	Cable
Brand	Eaglerise

Illumination Data

Colour Temperature	3000K
Lumen Output	2x420lm
Light Efficiency	70lm/W
CRI	80
Illumination Diagram	

Packing Info

Box Length	12cm
Box Width	6cm
Box Height	21cm
Box Weight	0.808kg
Pcs/Carton	12
Barcode	5291889043690
HS Code	9405409900

Certification & Warranty

Warranty	2 Years
Weee Directive	Yes