
06 Downlights Fixed LED>The IP54 Dark Light Bathroom Downlights Die cast 10120FD/W/W

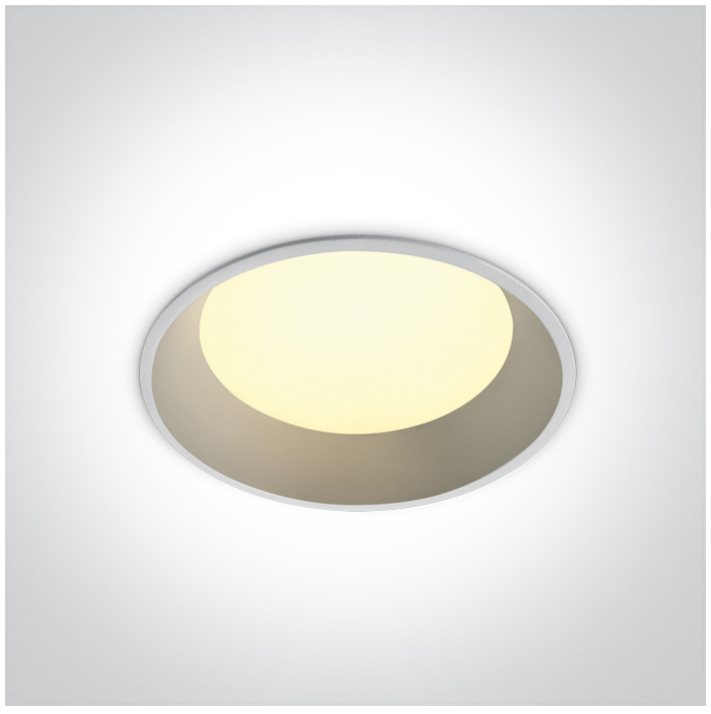

20W Dark Light SMD LED recessed downlight ideal for bathroom installation, IP54.

Complete with 300mA driver.


Complies with standard EN60598-1 and any other specific standards.

IP54 80 CRI DARK LIGHT

Downloads

IES

Dimensions

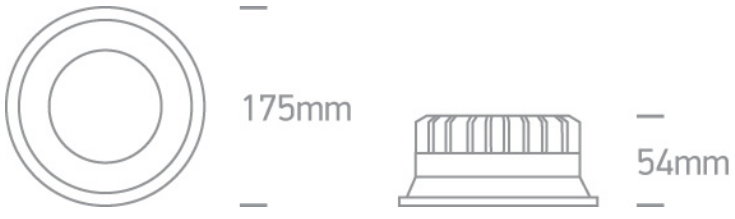

Gallery



Physical Specification

Item Group	06 Downlights Fixed LED
Family	The IP54 Dark Light Bathroom Downlights Die cast
Order Code	10120FD/W/W
Colour	White
Material	Die Cast
Shape	Circular
Height	54mm

Diameter	175mm
Cutout Hole Diameter	166mm
Recessed Ceiling	Yes
Depth Required	70mm
Indoor	Yes
Outdoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	⧈
Power(Watts)	20W
IP Rating	IP54
Light Source	LED built in
Dimmable	No
F Mark	F

Fitting

Input Type	Constant Current
Input Current	300mA
Voltage	65V
Safety Class	III
Power(Watts)	19,5W
IP Rating	IP54
Light Source	LED built in
LED Type	SMD 2835

LED Brand	Epistar
F Mark	

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	6-9W
Power Factor	0,9
Constant Current	Yes
300mA	20-30V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	Kegu

Illumination Data

Colour Temperature	3000K
Lumen Output	1700lm
Light Efficiency	85lm/W
CRI	80
Illumination Diagram	
Dark Light	Yes

Packing Info

Box Length	18,5cm
Box Width	7,5cm

Box Height	18,5cm
Box Weight	0.565kg
Pcs/Carton	20
Barcode	5291889051428
HS Code	9405413990

Certification & Warranty

Warranty	3 years