06 Downlights Fixed LED>The Dark Light Project Range

10125TD/W/W



25W LED recessed downlight, IP54. Suitable for Indoor/Outdoor installation.

Complete with 600mA driver.


Complies with standard EN60598-1 and any other specific standards.

IP54 80 CRI DARK LIGHT CE

Downloads

IES

Dimensions

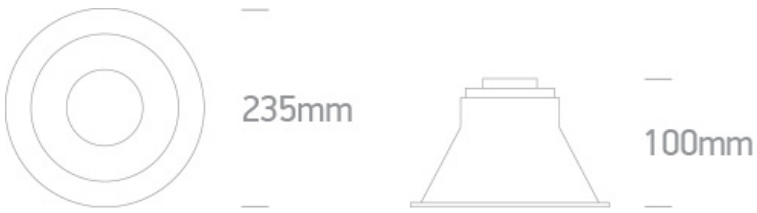

Physical Specification

Item Group	06 Downlights Fixed LED
Family	The Dark Light Project Range
Order Code	10125TD/W/W
Colour	White
Material	Aluminium
Shape	Circular
Height	100mm
Diameter	235mm
Cutout Hole Diameter	210mm
Recessed Ceiling	Yes
Depth Required	140mm
Indoor	Yes

Outdoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	⧈
Power(Watts)	25W
IP Rating	IP54
Light Source	LED built in
Dimmable	No
F Mark	F

Fitting

Input Type	Constant Current
Input Current	600mA
Voltage	39V
Safety Class	III
Power(Watts)	23,4W
IP Rating	IP54
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Epistar
F Mark	F

Gear

Gear Type	Led Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	18-24W
Power Factor	0,9
Constant Current	Yes
600mA	30-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	ONE

Illumination Data

Colour Temperature	3000K
Lumen Output	2400lm
Light Efficiency	95lm/W
CRI	80
Beam Angle	60°
Illumination Diagram	
Dark Light	Yes

Packing Info

Box Length	25cm
Box Width	25cm
Box Height	10,8cm
Pcs/Carton	12
Barcode	5291889069706
HS Code	9405409900

Certification & Warranty

Warranty	2 Years
Weee Directive	Yes