# 05 Downlights Fixed>UGR 19 CCT V Office Range Round

# 10130U/W/V



30W SMD LED UGR19 CCT Variable downlight, IP44.

Complete with 750mA driver.


Complies with standard EN60598-1 and any other specific standards.

IP44 IK04 CCT V 90 CRI UGR19 CE

## Downloads


IES

## Dimensions

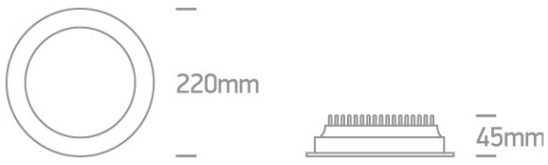


## Gallery





## Physical Specification

| | |
|---|---|
| Item Group | 05 Downlights Fixed |
| Family | UGR 19 CCT V Office Range Round |
| Order Code | 10130U/W/V |
| Colour | White |
| Material | Die Cast |
| Shape | Circular |
| Height | 45mm |

| | |
|---|---|
| Diameter | 220mm |
| Cutout Hole Diameter | 205mm |
| Recessed Ceiling | Yes |
| Depth Required | 65mm |
| Indoor | Yes |
| Adjustable | No |
| IK Rating | 4 |

## Electrical Characteristics

| | |
|---|---|
| Gear | External-Included |

### Fitting + Driver

| | |
|---|---|
| Input Voltage | 220-240V |
| 50 Hz | Yes |
| 60 Hz | Yes |
| Safety Class | ⧈ |
| Power(Watts) | 30W |
| IP Rating | IP44 |
| Light Source | LED built in |
| Dimmable | No |
| F Mark | F |

### Fitting

| | |
|---|---|
| Input Type | Constant Current |
| Input Current | 750mA |
| Safety Class | III |
| IP Rating | IP44 |
| Light Source | LED built in |
| LED Type | SMD 2835 |
| F Mark | F |

## Gear

| | |
|---|---|
| Gear Type | Led Driver |
| Input Voltage | 220-240V |
| 50 Hz | Yes |
| 60 Hz | Yes |
| Constant Current | Yes |
| IP Rating | IP44 |
| Safety Class |  |
| Dimmable | No |
| Brand | Lifud |
| Protection | Short Circuit and Overload |

## Illumination Data

| | |
|---|---|
| Colour Temperature | 3000K-4000K-6000K |
| Lumen Output | 2500lm |
| Light Efficiency | 83lm/W |
| CRI | 90 |
| Illumination Diagram |  |
| UGR | 19 |

## Packing Info

| | |
|---|---|
| Box Weight | 0.990kg |
| Pcs/Carton | 10 |
| Barcode | 5291889080886 |
| HS Code | 9405413990 |

## Certification & Warranty

| | |
|---|---|
| Warranty | 3 years |