04 Recessed Spots Adjustable LED>The Mini Series Aluminium

11103B/W/W



1W/2W COB LED adjustable recessed spot IP20.

Requires 350mA/700mA driver.


Complies with standard EN60598-1 and any other specific standards.




Downloads




Dimensions

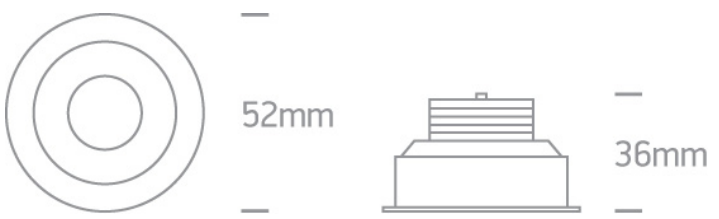

Gallery






Must be ordered separately



89004



89004A



89004AT

Physical Specification

Item Group	04 Recessed Spots Adjustable LED
Family	The Mini Series Aluminium
Order Code	11103B/W/W
Colour	White
Material	Aluminium
Shape	Circular
Height	36mm
Diameter	52mm
Cutout Hole Diameter	45mm
Recessed Ceiling	Yes
Depth Required	60mm
Indoor	Yes
Adjustable	1 Direction

Electrical Characteristics

Fitting

Input Type	Constant Current
Input Current	350mA/700mA
Safety Class	III
Power(Watts)	1W/2W
IP Rating	IP20
Light Source	LED built in
LED Type	COB
LED Brand	Bridgelux
LED Number	1
Cable Length	40cm
F Mark	F

Illumination Data

Colour Temperature	3000K
Lumen Output	200lm@700mA
Light Efficiency	100lm/W
CRI	90
Beam Angle	40°
Illumination Diagram	

Packing Info

Box Length	9cm
Box Width	6cm
Box Height	5,5cm
Box Weight	0.089kg
Pcs/Carton	100
Barcode	5291889042464
HS Code	9405413990

Certification & Warranty

Warranty	5 years