06 Downlights Adjustable>Dark Mirror Reflector Range

11120E/W/W



20W COB LED adjustable recessed Spot with dark chrome reflector.

Complete with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.

IP20 80 CRI ADJUSTABLE DARK LIGHT CE

Downloads

IES

Dimensions

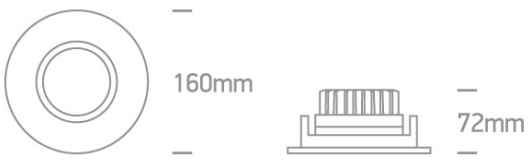

Physical Specification

Item Group	06 Downlights Adjustable
Family	Dark Mirror Reflector Range
Order Code	11120E/W/W
Colour	White
Material	Die Cast
Shape	Circular
Height	72mm
Diameter	160mm
Cutout Hole Diameter	140mm
Recessed Ceiling	Yes
Depth Required	110mm
Indoor	Yes

Adjustable	1 Direction

Electrical Characteristics

Gear	External-Included

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	⧈
Power(Watts)	20W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F

Fitting

Input Type	Constant Current
Input Current	500mA
Voltage	36,9V
Safety Class	III
Power(Watts)	18,45W
IP Rating	IP20
Light Source	LED built in
LED Type	COB
LED Brand	Cree
F Mark	F

Gear

Gear Type	Led Driver
Input Voltage	220-240V

50 Hz	Yes
60 Hz	Yes
Power(Watts)	12,5-20W
Power Factor	0,9
Constant Current	Yes
500mA	25-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	Lifud

Illumination Data

Colour Temperature	3000K
Lumen Output	1700lm
Light Efficiency	85lm/W
CRI	80
Beam Angle	30°
Illumination Diagram	
Dark Light	Yes

Packing Info

Box Weight	0.740kg
Pcs/Carton	20
Barcode	5291889064213
HS Code	9405413990

Certification & Warranty

Warranty	3 years