07 Strips & Profiles>24V Linkable Modules Aluminium

# 38001A/D



1W LED Linkable module, IP20 .


Requires 24V DC constant voltage LED driver.

Complies with standard EN60598-1 and any other specific standards.




## Downloads

## Dimensions

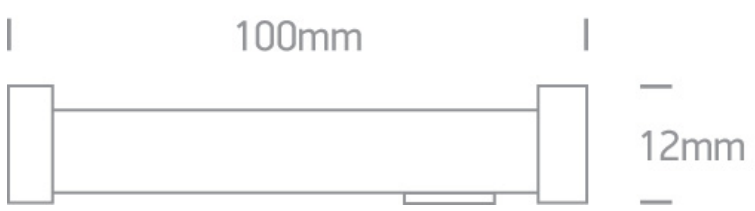


## Accessories



38006A



38007A

## Physical Specification

| | |
|---|---|
| Item Group | 07 Strips & Profiles |
| Family | 24V Linkable Modules Aluminium |
| Order Code | 38001A/D |
| Material | Aluminium |
| Shape | Rectangular |
| Length | 100mm |

| | |
|---|---|
| Width | 12mm |
| Height | 5m |
| Surface Ceiling | Yes |
| Surface Wall | Yes |
| Indoor | Yes |

## Electrical Characteristics

### Fitting

| | |
|---|---|
| Input Type | Constant Voltage |
| Input Voltage | 24V DC |
| Safety Class | III |
| Power(Watts) | 1W |
| IP Rating | IP20 |
| Light Source | LED built in |
| LED Type | SMD |
| F Mark | F |

## Illumination Data

| | |
|---|---|
| Colour Temperature | 6000K |
| Lumen Output | 64lm |
| Light Efficiency | 64lm/W |
| Illumination Diagram |  |

## Packing Info

| | |
|---|---|
| Box Weight | 0.040kg |
| Pcs/Carton | 100 |
| Barcode | 5291889016991 |
| HS Code | 9405114090 |

## Certification & Warranty

| | |
|---|---|
| Warranty | 3 years |