10 Office & Kitchen>Suspended Up/Down UGR19

38012B/W/V



50W CCT Variable 30x150cm LED suspended downlight + uplight panel.

55% downwards emission / 45% upwards emission.

Aluminium body with PMMA diffuser.


Complete with ceiling mounted driver-box including non-dimmable driver and 2m suspension kit.

Complies with standard EN60598-1 and any other specific standards.

IP20 CCT V 90 CRI UGR19 CE

Downloads

Dimensions

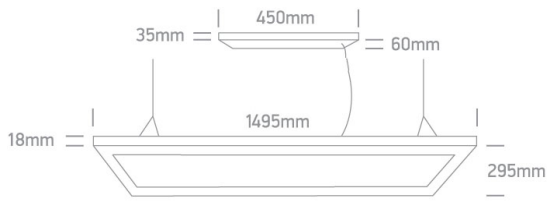

Gallery



Related items



89050LL

Physical Specification

Item Group	10 Office & Kitchen
Family	Suspended Up/Down UGR19
Order Code	38012B/W/V
Colour	White
Material	Aluminium
Diffuser Material	Plastic
Shape	Rectangular
Length	1495mm
Width	295mm
Height	18mm
Suspended Ceiling	Yes
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	Built In

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	⏚
Power(Watts)	50W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F

Fitting

Input Type	Constant Current
Light Source	LED built in

LED Type	SMD

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Output	1300mA
Safety Class	
Dimmable	No

Illumination Data

Colour Temperature	3000K-4000K-5700K
Lumen Output	5000lm
Light Efficiency	100lm/W
CRI	90
Illumination Diagram	
UGR	19

Packing Info

Box Weight	4.680kg
Pcs/Carton	4
Barcode	5291889083191
HS Code	9405119090

Certification & Warranty

Warranty	3 years
Weee Directive	Yes