10 Office & Kitchen>CCT V UGR19 Recessed LED Linear Profile

38145AR/W/V



CCT and Power variable 40W UGR19 Recessed linear with diffuser, ideal for offices.

Complete with power variable driver.


Complies with standard EN60598-1 and any other specific standards.

IP20 CCT V PV 90 CRI UGR19 CE

Downloads

IES

Dimensions

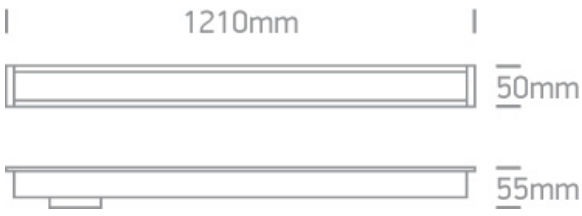

Gallery



Physical Specification

Item Group	10 Office & Kitchen
Family	CCT V UGR19 Recessed LED Linear Profile
Order Code	38145AR/W/V
Colour	White
Material	Aluminium
Shape	Rectangular
Length	1210mm

Width	50mm
Height	55mm
Cutout Hole Width	1200mm
Cutout Hole Length	37mm
Recessed Ceiling	Yes
Depth Required	80mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	Built In

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	⏚
Power(Watts)	20W-30W-40W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F

Fitting

Input Type	Constant Current
IP Rating	IP20
Light Source	LED built in
LED Type	SMD

Gear

Gear Type	Led Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
IP Rating	IP20
Dimmable	No

Illumination Data

Colour Temperature	3000K-4000K-5000K
Lumen Output	3800lm (40W)
Light Efficiency	95lm/W
CRI	90
Illumination Diagram	
UGR	19

Packing Info

Box Weight	1.710kg
Pcs/Carton	12
Barcode	5291889082477
HS Code	9405413990

Certification & Warranty

Warranty	3 years