
06 Downlights Fixed LED>The Rectangular Panels 1200x300mm

50140BRU/W/V

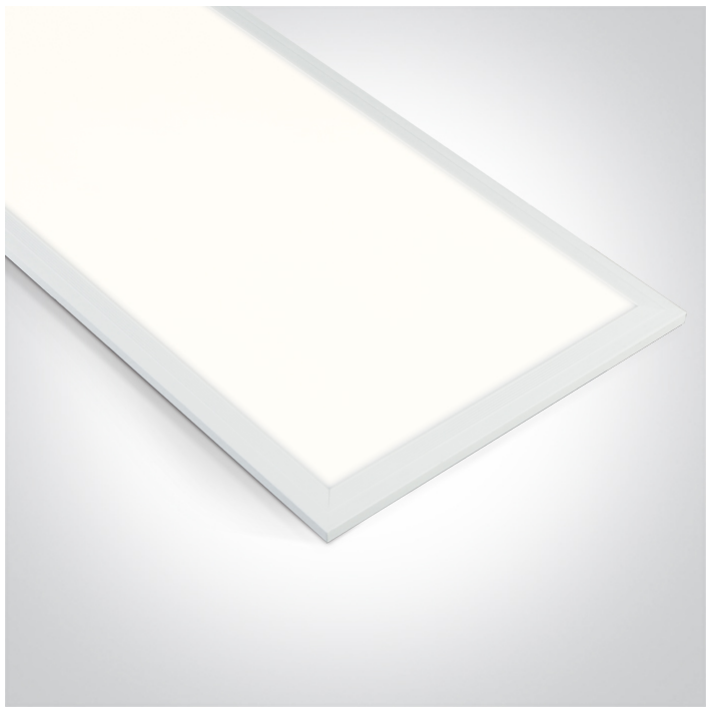

30x120 adjustable CCT recessed backlit LED panel with microprismatic diffuser for T-rail false ceilings.

Uniform lighting, ideal for commercial applications.

Complete with 1000mA driver.

Complies with standard EN60598-1 and any other specific standards.

IP20 80 CRI UGR19 CE

Downloads

IES

Dimensions



Related items


050017


050108


89040L

Physical Specification

Item Group	06 Downlights Fixed LED
Family	The Rectangular Panels 1200x300mm
Order Code	50140BRU/W/V
Colour	White
Material	Aluminium + Steel
Shape	Rectangular
Length	1195mm

Width	295mm
Height	30mm
Recessed T-Ceiling	Yes
Depth Required	50mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	⧈
Power(Watts)	40W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F

Fitting

Input Type	Constant Current
Input Current	1000mA
Voltage	38V
Safety Class	III
Power(Watts)	38W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Sanan

F Mark	

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	33-40W
Power Factor	0,9
Constant Current	Yes
1000mA	33-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Brand	ONE

Illumination Data

Colour Temperature	3000K-4000K-5700K
Lumen Output	3600lm-4000lm-3800lm
Light Efficiency	90lm/W - 100lm/W - 95Lm/W
CRI	80
Illumination Diagram	
UGR	19

Packing Info

Box Weight	2.300kg
Pcs/Carton	4
Barcode	5291889077169
HS Code	9405119090

Certification & Warranty

Warranty	3 years
Weee Directive	Yes