05 Downlights Fixed>Panels 600x600mm

50140B/W/C



40W 60x60 recessed backlit LED panel for T-rail false ceilings. Uniform lighting, ideal for commercial applications.

Complete with 850mA driver.


Complies with standard EN60598-1 and any other specific standards.

IP20 80 CRI CE

Downloads

IES CE

Dimensions

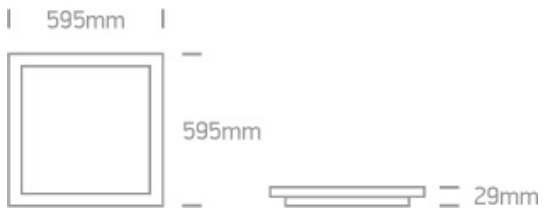

Gallery



Related items


050017


050108


89044L

Physical Specification

Item Group	05 Downlights Fixed
Family	Panels 600x600mm

Order Code	50140B/W/C
Colour	White
Material	Aluminium + Steel
Shape	Rectangular
Length	595mm
Width	595mm
Height	29mm
Recessed T-Ceiling	Yes
Depth Required	50mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	⧈
Power(Watts)	40W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	Ⓕ

Fitting

Input Type	Constant Current
Light Source	LED built in
LED Type	SMD

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Constant Current	Yes
850mA	
Dimmable	No

Illumination Data

Colour Temperature	4000K
Lumen Output	4000lm
Light Efficiency	100lm/W
CRI	80
Beam Angle	120°
Illumination Diagram	

Packing Info

Box Weight	2.300kg
Pcs/Carton	4
Barcode	5291889068334
HS Code	9405119090

Certification & Warranty

Warranty	3 years
Weee Directive	Yes