
# 05 Downlights Fixed>Panels For Germany/Austria 620x620mm

# 50140FA/V

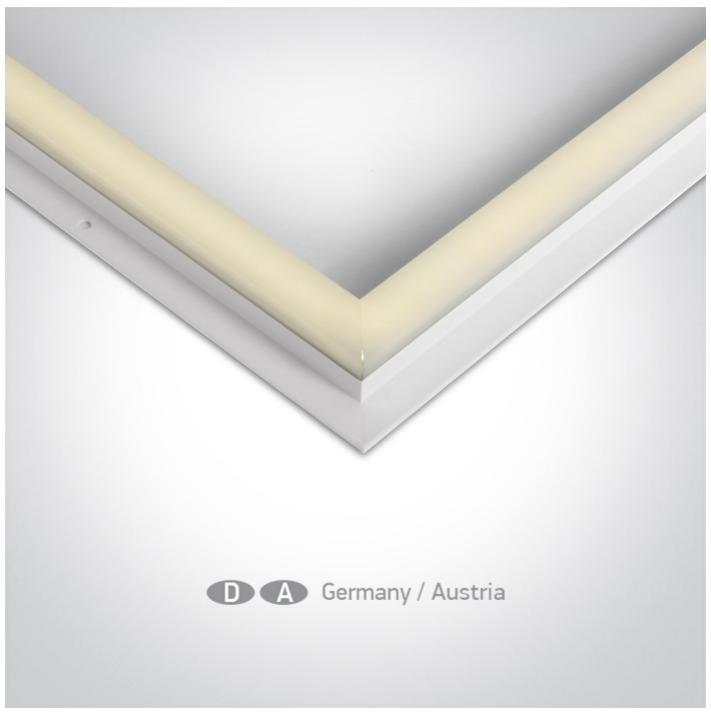


36W CCT Variable 62x62 recessed frame light LED panel for T-rail false ceiling.


Complete with non-dimmable driver.

Complies with standard EN60598-1 and any other specific standards.

IP20 CCT V 90 CRI CE

## Downloads

## Dimensions

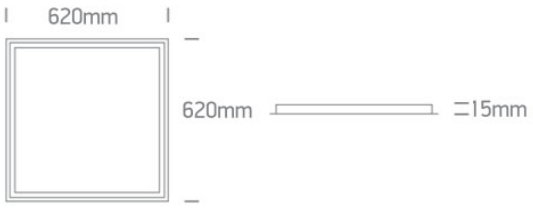


## Physical Specification

| | |
|---|---|
| Item Group | 05 Downlights Fixed |
| Family | Panels For Germany/Austria 620x620mm |
| Order Code | 50140FA/V |
| Material | Aluminium |
| Diffuser Material | PC |
| Shape | Rectangular |
| Length | 620mm |
| Width | 620mm |
| Height | 15mm |
| Recessed T-Ceiling | Yes |
| Depth Required | 50mm |
| Indoor | Yes |

| | |
|---|---|
| Adjustable | No |

## Electrical Characteristics

| | |
|---|---|
| Gear | External-Included |

### Fitting + Driver

| | |
|---|---|
| Input Voltage | 220-240V |
| 50 Hz | Yes |
| 60 Hz | Yes |
| Safety Class |  |
| Power(Watts) | 36W |
| IP Rating | IP20 |
| Light Source | LED built in |
| Dimmable | No |
| F Mark |  |

### Fitting

| | |
|---|---|
| Input Type | Constant Current |
| Light Source | LED built in |
| LED Type | SMD |

### Gear

| | |
|---|---|
| Gear Type | Led Driver |
| Input Voltage | 220-240V |
| 50 Hz | Yes |
| 60 Hz | Yes |
| Output | 950mA |
| Dimmable | No |

## Illumination Data

| | |
|---|---|
| Colour Temperature | 3000K-4000K-5500K |
| Lumen Output | 3600lm |
| Light Efficiency | 100lm/W |
| CRI | 90 |
| Illumination Diagram |  |

## Packing Info

| | |
|---|---|
| Box Weight | 0.825kg |
| Pcs/Carton | 4 |
| Barcode | 5291889083122 |
| HS Code | 9405119090 |

## Certification & Warranty

| | |
|---|---|
| Warranty | 2 years |
| Weee Directive | Yes |