13 Plafo>The LED Slim Line Plafo

62160A/B/W



62W LED slim plafo light, IP20, suitable for residential and commercial application.

Complete with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.

IP20 80 CRI QUICK FIX CE

Downloads

IES CE

Dimensions

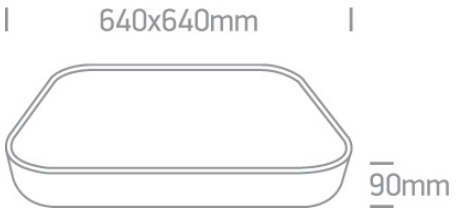

Physical Specification

Item Group	13 Plafo
Family	The LED Slim Line Plafo
Order Code	62160A/B/W
Colour	Black
Material	Metal
Shape	Rectangular
Length	640mm
Width	640mm
Height	90mm
Surface Ceiling	Yes
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	Built In

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	62W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting

Input Type	Constant Current
Input Current	1500mA
Voltage	39V
Safety Class	
Power(Watts)	58,5W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Sanan
F Mark	

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes

Power(Watts)	37,5-63W
Power Factor	0,9
Constant Current	Yes
1500mA	25-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	40°C
Operating Temp	80°C
Housing Material	Plastic
Output Terminal	Cable
Fast Connector	Yes
Fast Connector Type	Other
Brand	Lifud

Illumination Data

Colour Temperature	3000K
Lumen Output	3600lm
Light Efficiency	58,06lm/W
CRI	80
Beam Angle	120°
Illumination Diagram	

Packing Info

Box Length	72cm
Box Width	72cm
Box Height	12cm
Box Weight	8.000kg
Pcs/Carton	1
Carton Length	72cm

Carton Width	72cm
Carton Height	12cm
Carton Weight	8Kg
Barcode	5291889056942
HS Code	9405413990

Certification & Warranty

Warranty	3 years