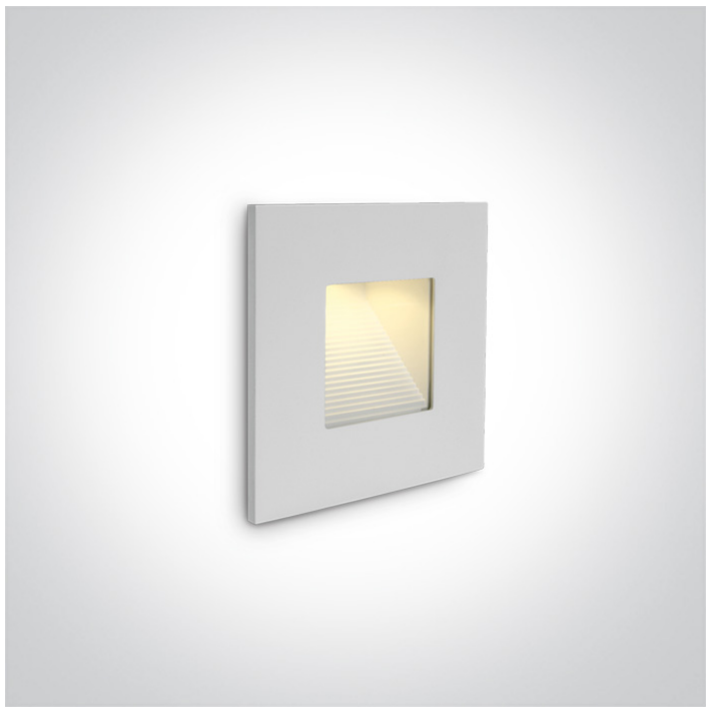
18 Wall Recessed & Inground>Dark Light Wall Recessed

68006N/W



1W wall recessed LED light, ideal for step and corridor illumination.

Supplied complete with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.

IP44 90 CRI DARK LIGHT CE

Downloads

IES


Dimensions





Gallery



Must be ordered separately


050176/B


050176/G


050176/W

Physical Specification

Item Group	18 Wall Recessed & Inground
Family	Dark Light Wall Recessed
Order Code	68006N/W
Material	Die Cast
Shape	Rectangular
Length	85mm
Width	85mm
Height	32mm
Cutout Hole Width	70mm
Cutout Hole Length	70mm
Recessed wall	Yes
Depth Required	40mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	⧈
Power(Watts)	1W
IP Rating	IP44
Light Source	LED built in
Cable Length	12cm
F Mark	F

Fitting

Input Type	Constant Current
Input Current	350mA
Voltage	2,5V
Safety Class	
Power(Watts)	0,9W
IP Rating	IP44
Light Source	LED built in
LED Type	SMD 3535
LED Brand	Bridgelux

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	1-4W
Power Factor	0,5
Constant Current	Yes
350mA	2,8-11V
IP Rating	IP20
Safety Class	
Housing Material	Plastic
Brand	One Light

Illumination Data

Colour Temperature	3000K
Lumen Output	80lm
Light Efficiency	80lm/W
CRI	90
Illumination Diagram	
Dark Light	Yes

Packing Info

Box Weight	0.115kg
Pcs/Carton	20
Barcode	5291889062868
HS Code	9405413990

Certification & Warranty

Warranty	3 years