19 Wall Recessed & Inground>Indoor/Outdoor Dark Light Wall Recessed 68032/AL/W



3W LED recessed wall light, IP54, ideal for, indoor and outdoor, corridors and stairs illumination.

Complete with driver.

Supplied with box for concrete installation


Complies with standard EN60598-1 and any other specific standards.

IP54 DARK LIGHT CE

Downloads

IES

Dimensions

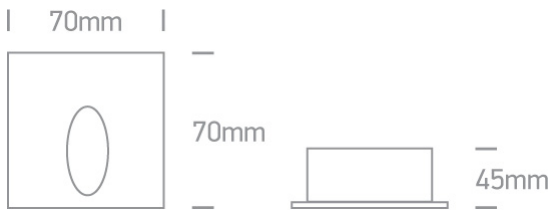

Gallery



Physical Specification

Item Group	19 Wall Recessed & Inground
Family	Indoor/Outdoor Dark Light Wall Recessed
Order Code	68032/AL/W
Colour	Aluminium
Material	Natural Aluminium
Shape	Rectangular
Length	70mm

Width	70mm
Height	45mm
Cutout Hole Diameter	52mm
Recessed wall	Yes
Depth Required	110mm Concrete 50mm Gypsum
Indoor	Yes
Outdoor	Yes
Adjustable	No

Electrical Characteristics

Gear	Built In

Fitting + Driver

Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	⧈
Power(Watts)	3W
IP Rating	IP54
Light Source	LED built in
Dimmable	No
F Mark	F

Fitting

Input Type	Constant Current
Input Current	700mA
Voltage	4V
Safety Class	III
Power(Watts)	2,8W
IP Rating	IP54
Light Source	LED built in

LED Brand	Cree
F Mark	

Gear

Gear Type	Led Driver
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	2,8-3,5W
Power Factor	0,5
Constant Current	Yes
700mA	4-5V
IP Rating	IP20
Safety Class	
Brand	HEP
Protection	0


Illumination Data

Colour Temperature	3000K
Illumination Diagram	
Dark Light	Yes

Packing Info

Box Length	11cm
Box Width	7,5cm
Box Height	7,5cm
Box Weight	0,3Kg
Pcs/Carton	30
Barcode	5291889021858
HS Code	9405409900

Energy Label

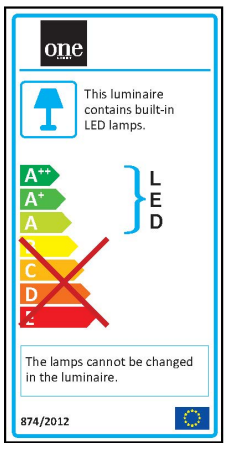

Certification & Warranty

Warranty	2 Years
Weee Directive	Yes