18 Wall Recessed & Inground>The Inground Mini Series

69042/AL/W



2W LED inground, IP67, aluminium, for path illumination.

Requires 700mA driver.


Complies with standard EN60598-1 and any other specific standards.

IP67 IK08 WALK OVER 90 CRI DIMMABLE CE


Downloads

IES

Dimensions

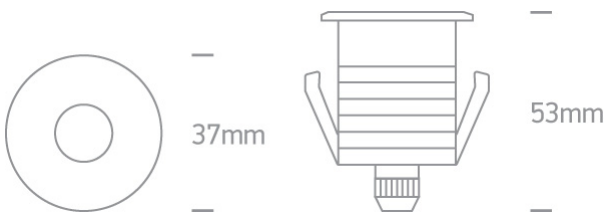

Must be ordered separately


89004A


89004AT

Physical Specification

Item Group	18 Wall Recessed & Inground
Family	The Inground Mini Series
Order Code	69042/AL/W
Colour	Aluminium
Material	Natural Aluminium
Diffuser Material	Glass

Shape	Circular
Height	53mm
Diameter	37mm
Cutout Hole Diameter	30mm decking 35mm concrete
Inground	Yes
Depth Required	80mm deck 95mm+300mm drainage Concrete
Indoor	Yes
Outdoor	Yes
Adjustable	No
IK Rating	8

Electrical Characteristics

Fitting

Input Type	Constant Current
Input Current	700mA
Voltage	3,1V
Safety Class	III
Power(Watts)	2W
IP Rating	IP67
Light Source	LED built in
LED Brand	Osram
LED Number	1
Cable Length	200cm
F Mark	F

Illumination Data

Colour Temperature	3000K
Lumen Output	150lm
Light Efficiency	75lm/W

CRI	90
Illumination Diagram	

Packing Info

Box Length	6,5cm
Box Width	5cm
Box Height	10,5cm
Box Weight	0.190kg
Pcs/Carton	50
Barcode	5291889045243
HS Code	9405413990

Certification & Warranty

Warranty	2 years
Weee Directive	Yes