18 Wall Recessed & Inground>The Asymmetric Inground Stainless steel 69062/W



8W COB LED inground assymetrical beam, IP67, stainless steel 316, for path illumination.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.

IP67 IK08 WALK OVER 80 CRI CE

Downloads

IES CE

Dimensions

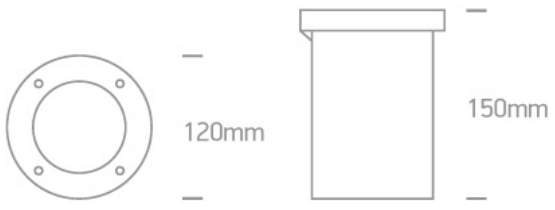

Gallery



Physical Specification

Item Group	18 Wall Recessed & Inground
Family	The Asymmetric Inground Stainless steel
Order Code	69062/W
Colour	Stainless Steel
Material	Stainless Steel 316
Shape	Circular
Height	150mm

Diameter	120mm
Cutout Hole Diameter	115mm
Inground	Yes
Depth Required	170mm+300mm drainage
Indoor	Yes
Outdoor	Yes
Adjustable	No
IK Rating	8

Electrical Characteristics

Gear	Built In

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	8W
IP Rating	IP67
Light Source	LED built in
Dimmable	No
Cable Length	200cm
F Mark	

Fitting

Input Type	Constant Current
Input Current	350mA
Voltage	22V
Safety Class	
Power(Watts)	7,7W
IP Rating	IP67

Light Source	LED built in
LED Type	SMD 2835
LED Brand	Edison

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	4,2-7W
Power Factor	0,8
Constant Current	Yes
350mA	12-20V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	-20~+55°C
Operating Temp	80°C
Housing Material	Plastic
Output Terminal	Connector
Brand	HEP
Protection	Short Circuit

Illumination Data

Colour Temperature	3000K
Lumen Output	680lm
Light Efficiency	85lm/W
CRI	80
Illumination Diagram	

Packing Info

Box Weight	1.225kg
Pcs/Carton	12
Barcode	5291889066071
HS Code	9405413990

Certification & Warranty

Warranty	2 years