18 Wall Recessed & Inground>The Low Depth Inground 24V DC

69076A/W



3x1W LED inground. IP67, stainless steel 316L and die cast aluminium body.


Requires 24V DC driver.

Complies with standard EN60598-1 and any other specific standards.

IP67 IK10 CAR OVER 90 CRI DIMMABLE CE

Downloads

Dimensions

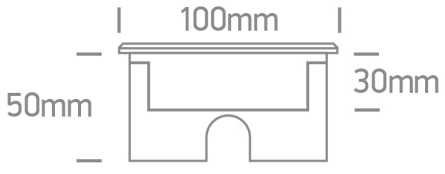

Gallery



Physical Specification

Item Group	18 Wall Recessed & Inground
Family	The Low Depth Inground 24V DC
Order Code	69076A/W
Colour	Stainless Steel
Material	Stainless Steel 316
Shape	Circular
Height	50mm

Diameter	100mm
Inground	Yes
Depth Required	50mm+300mm drainage
Indoor	Yes
Outdoor	Yes
Adjustable	No
IK Rating	10

Electrical Characteristics

Gear	Order Separately

Fitting

Input Type	Constant Voltage
Input Voltage	24V DC
Safety Class	
Power(Watts)	3W
Light Source	LED built in
Cable Length	2m
F Mark	

Illumination Data

Colour Temperature	3000K
Lumen Output	300lm
Light Efficiency	100lm/W
CRI	90
Beam Angle	45°
Illumination Diagram	

Packing Info

Box Weight	0.625kg

Pcs/Carton	24
Barcode	5291889084037
HS Code	9405413990

Certification & Warranty

Warranty	2 years