WIMBLEDON LIGHTING SINCE 1989

22 Emergency Lights>MR16 LED Emergency Kit

89002A



3W Emergency LED recessed , IP20, ideal for corridors . It can be used maintained or non-maintained mode.

For maintained mode requires 89004 driver


Supplier with battery & MR16 LED module 7305M/D.

Complies with standard EN60598-1 and any other specific standards.

IP20

Downloads


Dimensions

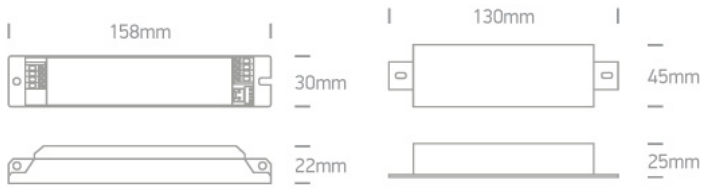


Wiring Diagram

MAINTAINED MODE

* Driver 89004 must be ordered separately

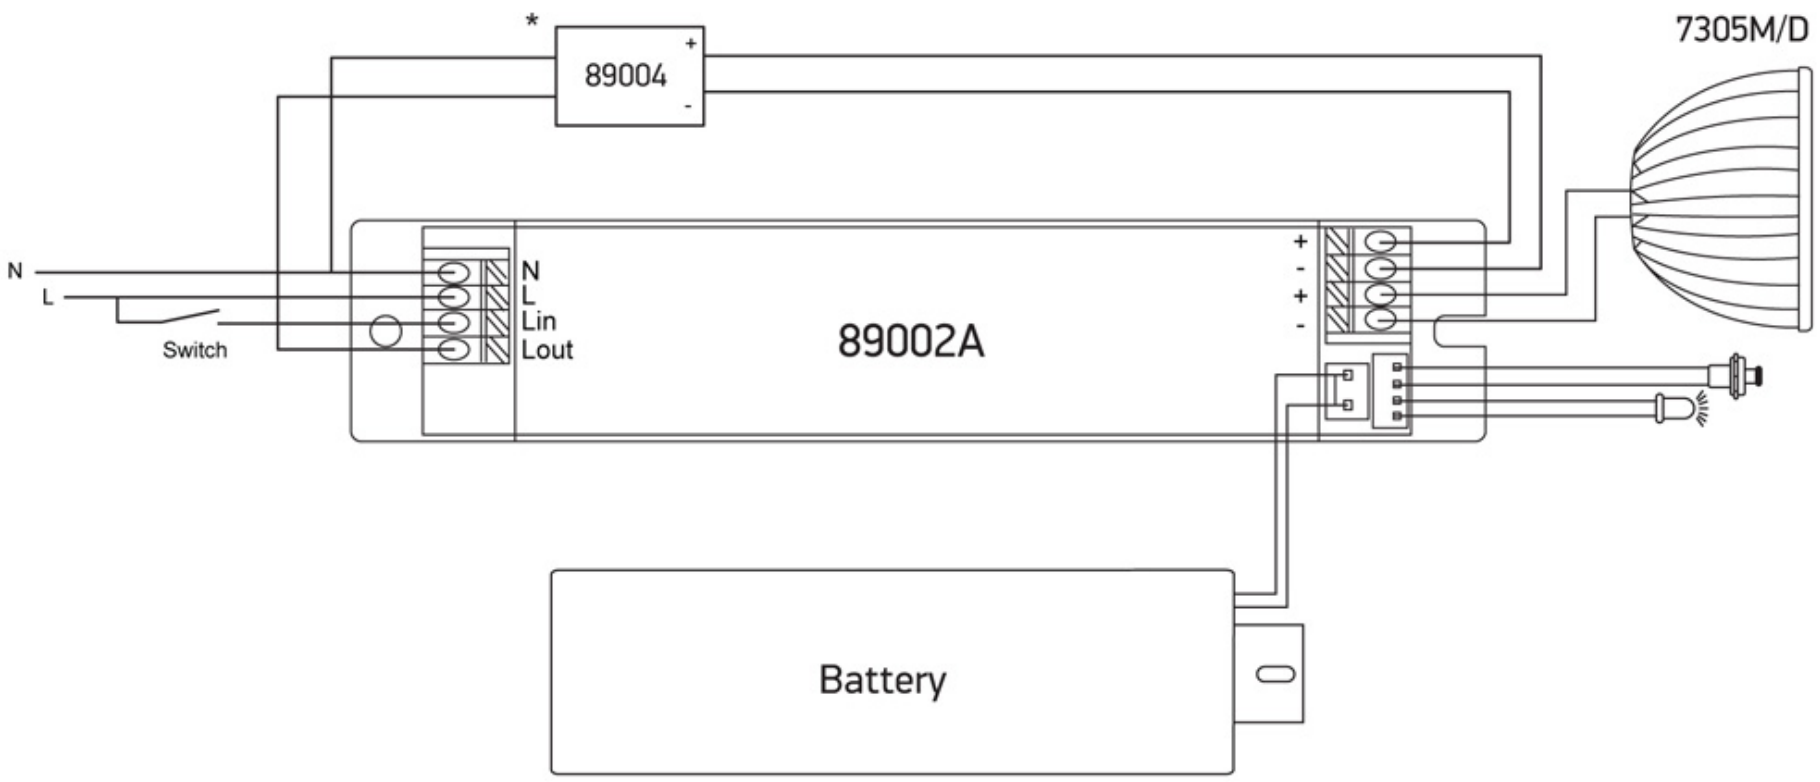

NON-MAINTAINED MODE

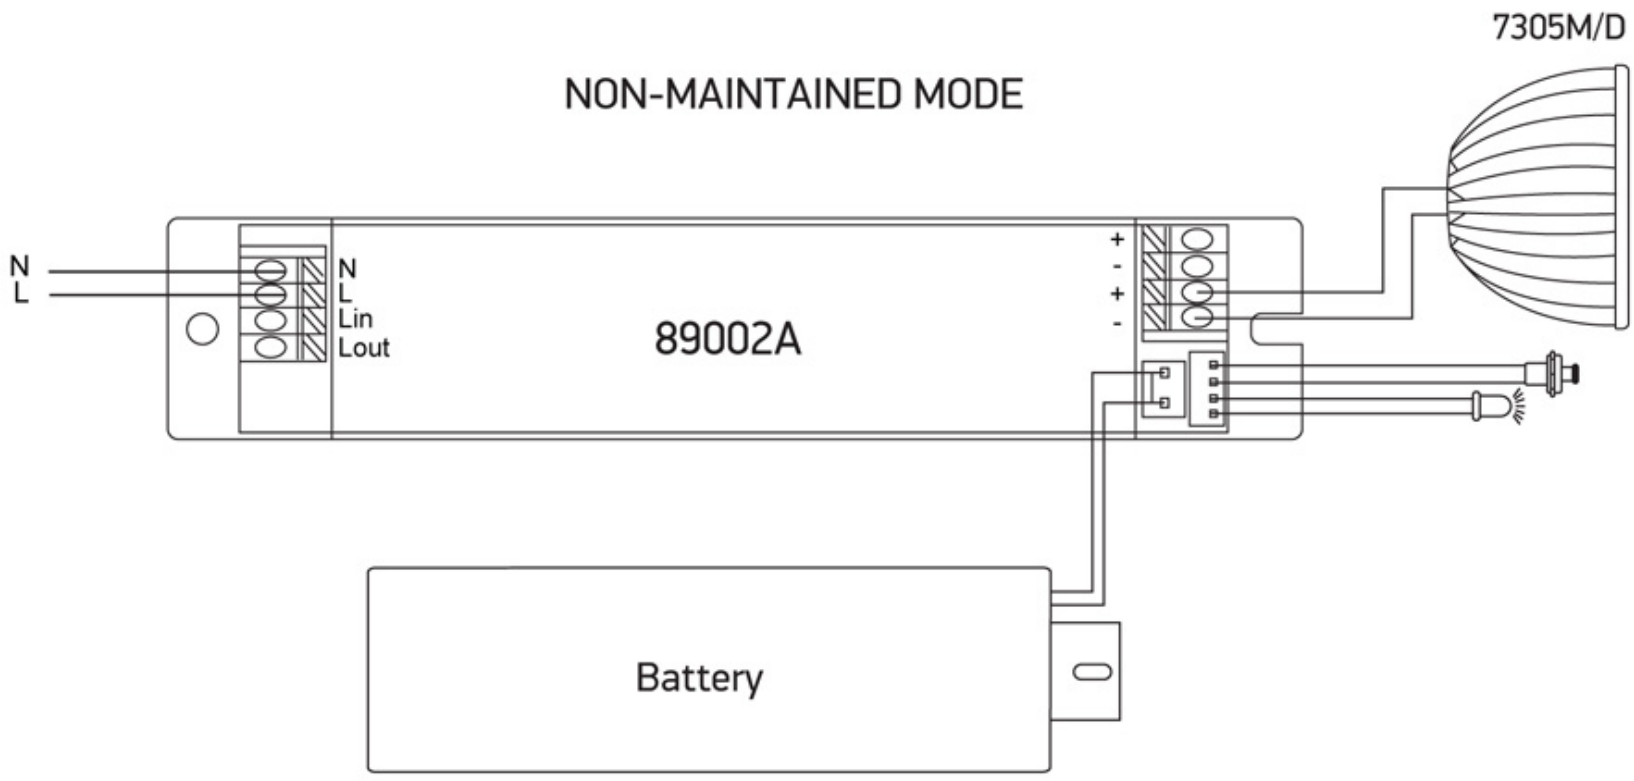

Physical Specification	
Item Group	22 Emergency Lights
Family	MR16 LED Emergency Kit
Order Code	89002A
Material	Aluminium + Plastic
Shape	Rectangular
Recessed Ceiling	Yes
Indoor	Yes

Adjustable	No

Electrical Characteristics

Gear	External-Included

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	3W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting

Input Type	Constant Current
Input Current	350mA
Safety Class	
Power(Watts)	3W
IP Rating	IP20
Light Source	LED built in
F Mark	

Gear

Gear Type	Emergency Kit
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
IP Rating	IP20
Dimmable	No

Housing Material	Metal
Output Terminal	Connector
Battery Capacity	2Ah
Battery Voltage	4,8V
Operation Time	3 hours
Charging Time	24 hours
Maintained	Yes
Non Maintained	Yes

Illumination Data

Colour Temperature	6000K
Illumination Diagram	

Packing Info

Box Weight	0.383kg
Pcs/Carton	24
Barcode	5291889066446
HS Code	8504408290

Certification & Warranty

Warranty	2 Years
Weee Directive	Yes