



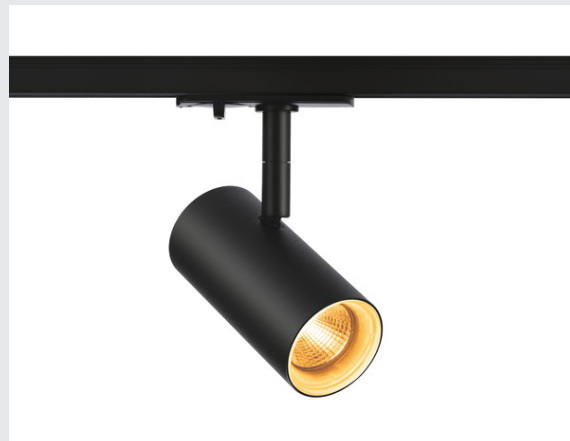

NOBLO SPOT

black, 2700K, 36°, incl. 1-circuit adapter

Adjustable LED spot NOBLO with suitable adapter for the 240V 1-circuit track system. The luminaire impresses with its slim design and is therefore ideal for modern lighting concepts. The luminaire is made from aluminium and equipped with a Premium LED module.



TECHNICAL DATA

Item no.	1001862
Number of different light outlets	1
Rotating or tilting	rotary Bar and tiltable
IP Code	IP 20
Assembly	Surface
Assembly details	Track Ceiling, Track Wall
Dimmable	Yes
Dimming technology	trailing edge
Primary nominal voltage	220-240V ~50/60Hz
Secondary power / voltage	350 mA
Safety class	I
Wattage	8 W
Minimum ambient temperature	-20 °C
Maximum ambient temperature	30 °C
Operating efficiency (LOR)	0,8
Number of luminaires at LS B16A	128
Number of luminaires at LS C16A	160
Level of inrush current	3.5 A
Duration of inrush current	120 µs
Stroboscopic effect (SVM)	0.4
Lumen	620 lm
Colour temperature	2700 Kelvin

Light Source

916369		Beam angle	36 °
		Color	black
		CRI	80
		LXXBXX data	L70B50
		Service life	30000 h
		Risk Group	1
		Length	10.5 cm
		Height	10.7 cm
		Diameter	5 cm
		Net weight	0.243 kg
		Gross weight	0.324 kg