
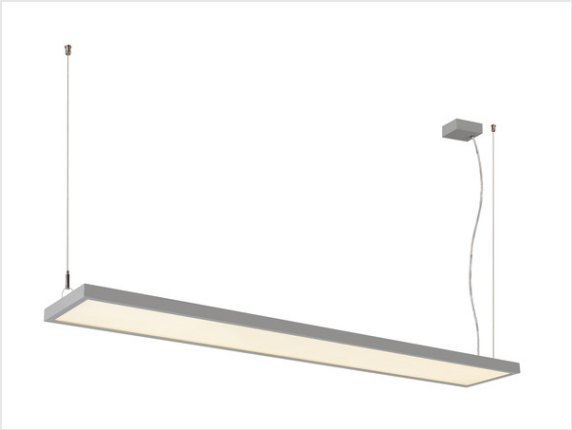


# WORKLIGHT PRO 150

**pendant light, 150cm, 4000K, DALI, Touch, grey**

The new WORKLIGHT PRO stands for high performance in the workplace: the DALI-controllable pendant light is optimally designed in line with the latest DIN EN 12464:2021 standard. Its glare-free (UGR<19) luminous efficiency of 127 lm/W, a colour temperature of 4000K and improved, indirect light output offers everything you need for an ergonomic working environment. Dimmability and a long lifespan of 50,000 hours also help to make the office pendant light what it is: a true SLV colleague that assists with productivity.




## TECHNICAL DATA

| | |
|---|---|
| **Item no.** | 1007473 |
| **Number of different light outlets** | 2 |
| **IP Code** | IP 20 |
| **Impact resistance class** | IK 03 |
| **Impact resistance** | 0.35 Joule |
| **Assembly** | Surface |
| **Assembly details** | Ceiling |
| **Dimmable** | Yes |
| **Dimming technology** | DALI,Touch |
| **Primary nominal voltage** | 200-240V ~50/60Hz |
| **Secondary power / voltage** | 1400 mA |
| **Safety class** | I |
| **Wattage** | 59 W |
| **Minimum ambient temperature** | -20 °C |
| **Maximum ambient temperature** | 45 °C |
| **Number of luminaires at LS B16A** | 37 |
| **Number of luminaires at LS C16A** | 37 |
| **Level of inrush current** | 5.1 A |
| **Duration of inrush current** | 148 µs |
| **Stroboscopic effect (SVM)** | 0.4 |
| **Lumen** | 7200 lm |
| **Colour temperature** | 4000 Kelvin |

## Light Source

| | |
|---|---|
| 1807477 |  |
| 1807478 |  |

| | |
|---|---|
| **Beam angle** | 80 ° |
| **Color** | grey |
| **CRI** | 80 |
| **UGR ≤** | 19 |
| **LXXBXX data** | L80B10 |
| **Service life** | 50000 h |
| **Risk Group** | 0 |
| **Length** | 150 cm |
| **Height** | 24 cm |
| **Depth** | 3.28 cm |
| **Pendant length** | 250 cm |
| **Net weight** | 6 kg |
| **Gross weight** | 6.42 kg |
| **BIG WHITE Page** | 287 |