
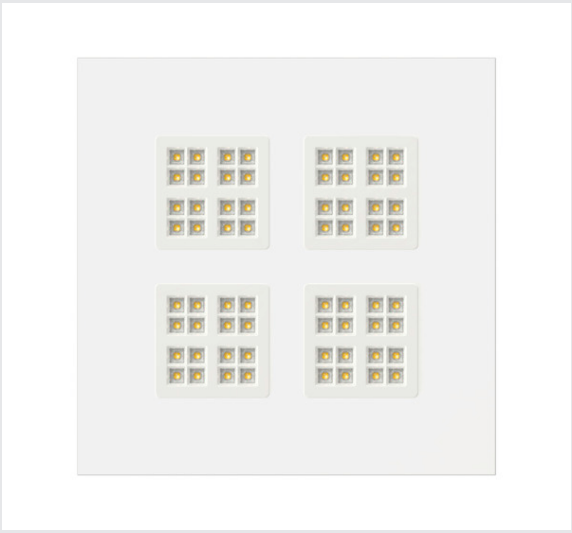


# PAVANNO

**600 45 830/840/850 WB WH UGR19**

PAVANNO: energy-efficient, durable, eligible for subsidies. With up to 190 lm/W, 100,000 h service life, UGR<19, multi-lumen/colour and DALI control, the luminaire is perfect for working environments such as offices, training rooms or healthcare facilities.




## TECHNICAL DATA

| | |
|---|---|
| **Item no.** | 1010713 |
| **IP Code** | IP20 |
| **Impact resistance class** | IK 02 |
| **Assembly** | Recessed |
| **Assembly details** | Ceiling |
| **Primary nominal voltage** | 220-240V ~0/50/60 Hz |
| **Secondary power / voltage** | 500-1100 mA |
| **Safety class** | II |
| **Wattage** | 17 W |
| **Minimum ambient temperature** | -20 °C |
| **Maximum ambient temperature** | 40 °C |
| **Number of luminaires at LS B16A** | 27 |
| **Number of luminaires at LS C16A** | 45 |
| **Level of inrush current** | 19.1 A |
| **Duration of inrush current** | 220 µs |
| **Lumen** | 2957 / 6882 lm |
| **Colour temperature** | 3000/4000/5000 Kelvin |
| **Beam angle** | 80 ° |
| **Color** | white |
| **CRI** | 80 |
| **UGR ≤** | 19 |
| **Service life** | 100000 h |

## Light Source

| | |
|---|---|
| 2481882 |  |

| | |
|---|---|
| **Risk Group** | 1 |
| **Length** | 60 cm |
| **Width** | 60 cm |
| **Height** | 2 cm |
| **Net weight** | 3 kg |
| **Gross weight** | 3.4 kg |