Datasheet



Description


Offers a dim-to-warm range from 1800K to 3000K, providing dynamic lighting options with high CRI>90 for residential or commercial spaces.

LED Stripe


Size	10x1.2mm
Length	5m
Cable Length	15cm
Lumen/m	1010lm
LED Type	SMD
Wattage	10W per meter
CCT	1800-3000K Dim to Warm
Energy Class	F
LED Chip lifetime	54.000h
Driver	not incl.
SDCM	<5
CRI	90
Efficacy (lm/w)	101
IP Rating	IP20
Safety class	III
Voltage	24VDC
Beam angle	120°
LED/m	224
Weight(kg)	0.076


Color	Art.No
○	V123024N1T

Feed-in and Connectors Available

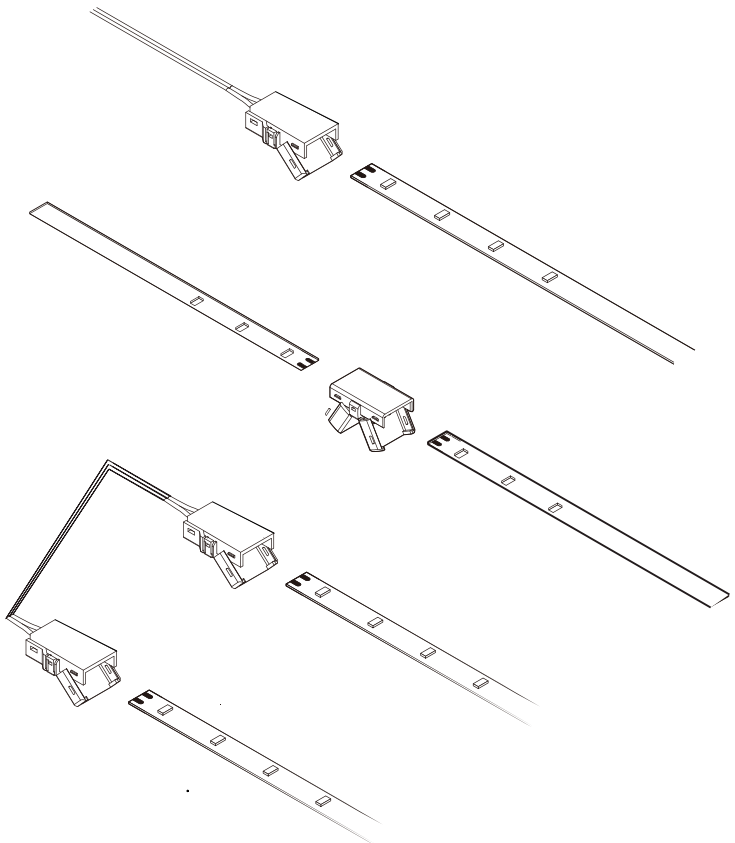

Technical drawing

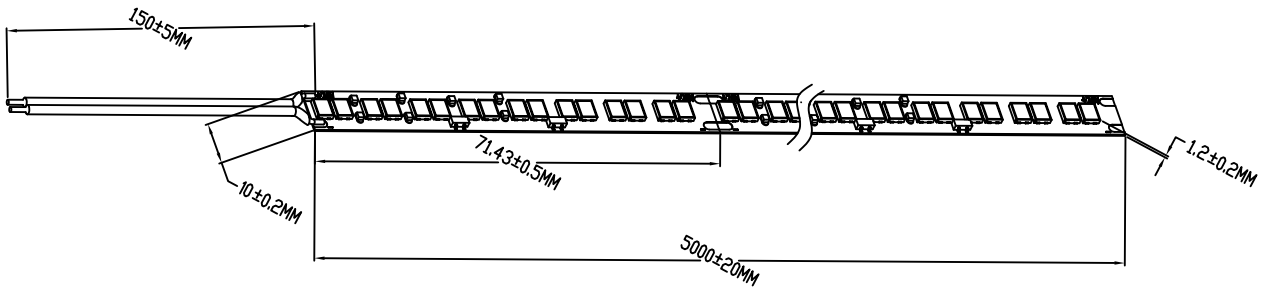

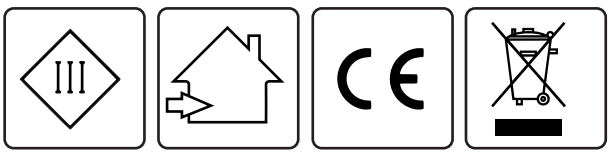

Accessories

ALU




LED Profile In

Size	2000x26.35x13mm

Color	Art.No
○ White	V124201N0W
● Black	V124201N0B
○ Silver	V124201N0S

ALU



LED Profile On

Size	2000x17.6x13mm


Color	Art.No
○ White	V124202N0W
● Black	V124202N0B
○ Silver	V124202N0S



LED Profile Cap, 2pcs

Color	Art.No
○ White	V124203N0W
● Black	V124203N0B
○ Silver	V124203N0S

PC



LED Profile Cover, Frosted

Size	2000x15.9x3.81mm

Color	Art.No
○ White	V124204N0W



D2W Strip Feedin 24V/2,5A

Length	15cm

Color	Art.No
○ Transparent	V831124N0T



D2W Strip2Strip Connector 24V/2,5A

Color	Art.No
○ Transparent	V831024N0T



D2W Strip Flex Connector 24V/2,5A

Length	15cm

Color	Art.No
○ Transparent	V831224N0T



Triac Dimmable, 230V/50Hz 24V

Watt	Art.No
25W	CV25W24CG TRIAC
50W	CV50W24CG TRIAC
100W	CV100W24CG TRIAC

See more details on vysnlighting.com

Disclaimer
All technical data as well as weight and dimension specifications are based on standard values and have been carefully prepared. We reserve the right to make technical changes at any time to reflect progress. Product images are for illustrative purposes and may differ from the original. Errors excepted.
As of: 08/08/2025. Orders are subject to our General Terms and Conditions of Sale, available at
https://www.vysnlighting.com/de/pages/agb

©VYSN GmbH - Siemensstr.12 - 52525 Heinsberg - www.vysnlighting.com
sales@vysn.de - +49 (0) 2452 -98 87 10