

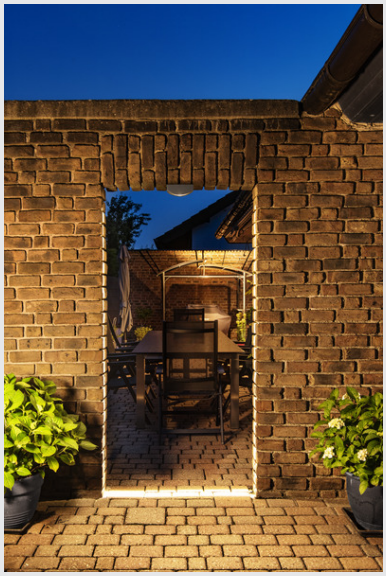


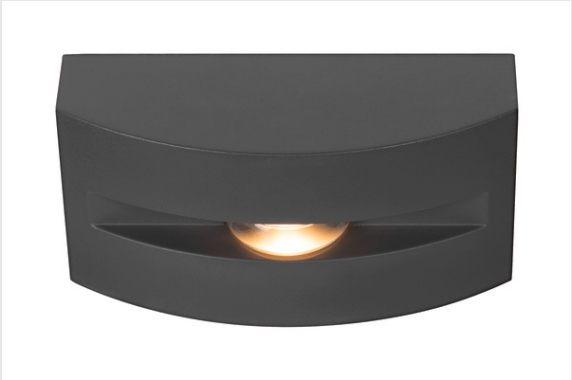

# OUT-BEAM FRAME CW

**Outdoor LED wall and ceiling mounted light anthracite 3000K**

With the anthracite-coloured OUT-BEAM FRAME CW, you have an outdoor surface-mounted light which is ideally suited for accentuating buildings. This light is intended for use in both residential and public areas. Thanks to the OUT-BEAM FRAME CW you can illuminate historical or modern buildings with wonderful effects. With an expected lifespan of 30,000 hours, the LED light is extremely sustainable and requires little maintenance.




## TECHNICAL DATA

| | |
|---|---|
| **Item no.** | 1003518 |
| **IP Code** | IP 55 |
| **Impact resistance class** | IK 03 |
| **Impact resistance** | 0.35 Joule |
| **Assembly** | Surface |
| **Assembly details** | Ceiling,Ground,Wall |
| **Number of through-wires** | 10 |
| **Primary nominal voltage** | 100-240V ~50/60Hz |
| **Secondary power / voltage** | 700 mA |
| **Safety class** | I |
| **Wattage** | 3.5 W |
| **Minimum ambient temperature** | -20 °C |
| **Maximum ambient temperature** | 40 °C |
| **Level of inrush current** | 15 A |
| **Duration of inrush current** | 300 µs |
| **Stroboscopic effect (SVM)** | 0 |
| **Lumen** | 60 lm |
| **Colour temperature** | 3000 Kelvin |
| **Beam angle** | 5 ° |
| **Color** | anthracite |
| **CRI** | 80 |
| **LXXBXX data** | L70B50 |

| | |
|---|---|
| 916607 |  |

| | |
|---|---|
| **Service life** | 30000 h |
| **Risk Group** | 1 |
| **Length** | 17.3 cm |
| **Width** | 8.5 cm |
| **Height** | 6.7 cm |
| **Net weight** | 0.61 kg |
| **Gross weight** | 0.653 kg |
| **BIG WHITE Page** | 811 |