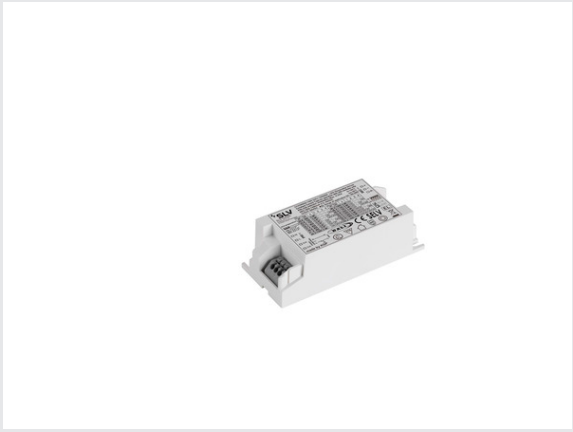


LED driver 53 W

650-1400 mA, DALI

This DALI and push-dim capable constant current driver with 36 W output offers an adjustable current via DIP: 650 mA, 700 mA, 750 mA, 800 mA, 850 mA, 900 mA, 950 mA, 1000 mA, 1050 mA, 1100 mA, 1150 mA, 1200 mA, 1250 mA, 1300 mA, 1350 mA, 1400 mA. A strain relief is optionally available.

TECHNICAL DATA

Item no.	1008669
IP Code	IP20
Dimmable	Yes
Dimming technology	DALI,Touch
Primary nominal voltage	220-240V ~0/50/60 Hz
Safety class	II
Safety class	II
Wattage	59.7 W
Minimum ambient temperature	-20 °C
Maximum ambient temperature	40 °C
Number of luminaires at LS B16A	53
Number of luminaires at LS C16A	84
Level of inrush current	9.5 A
Duration of inrush current	16 µs
Color	white
Depth	0 cm
Net weight	0.165 kg
Gross weight	0.174 kg
BIG WHITE Page	93

Accessories

1008674	Strain relief standard , for DALI dimmable drivers: 1008669
1008673	Strain relief through-wirable , for DALI dimmable drivers: 1008666, 1008667, 1008668